

brennenstuhl®



DK

POWER DISTRIBUTION .
LIGHT · HOME & SECURITY

2024
2025





switch it on.

Quality and experience for over 60 years.

For over 60 years, this claim has accompanied our family business in the development of new products. Millions of products sold every year oblige us to set high standards for design and function. Quality and safety are our top priorities, and this on an international level. The success story of the brennenstuhl® Group began in 1958.

Since then we have grown continuously and are now one of the world's leading companies in the field of electronics and electrical engineering. Our market success is based on a constant stream of new ideas which we turn into innovative products in close cooperation with our customers. Numerous national and international patents protect these innovations and prove our technical lead. Decades of experience and the high standards we set ourselves guarantee the first-class quality of brennenstuhl® products.

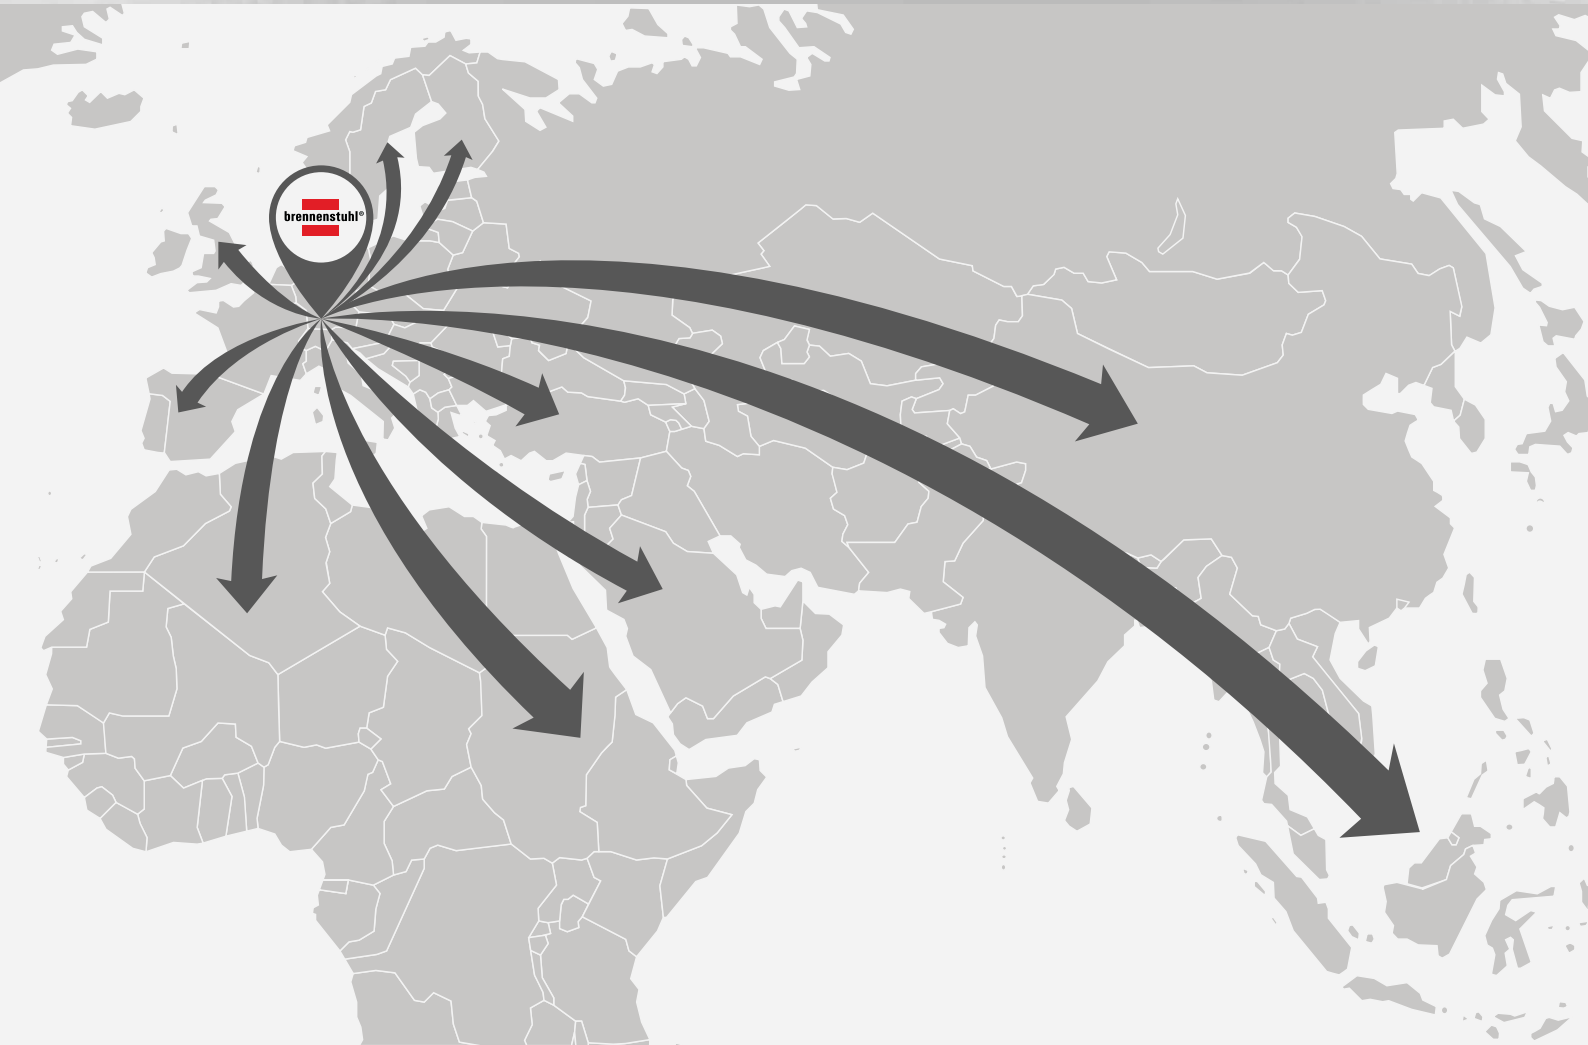



Extension Leads



Premium-Alu-Line Extension Lead

Extension lead in a slim design as an optimal power supply in the home office or at the workplace.

- Shapely, timeless, stable housing made of aluminium with insensitive, matt anodised surface.
- Extra robust stability and slim design.
- Protective contact sockets in 45° arrangement, also for angled plugs.
- Safety switch illuminated, two-pole on/off.
- The innovative mounting concept allows the extension lead to be mounted on the wall or attached to the table.
- Sockets with increased protection against accidental contact.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1391035600
EAN	4007123677481
UP	2
Cable length	3 m
Cable designation	H05VV-F 3G1,5
Cable quality	PVC
Socket outlets switchable	6
Socket outlets total	6
Max. current carrying capacity	10 A
Colour	black/silver



Premium-Line Extension Lead

with USB-Charger

- Robust extension lead, designed to be the best and made of break-resistant special plastic material.
- Elegant, sleek, timeless, high-quality design.
- Illuminated 2-pole ON/OFF safety switch.
- Total charging amperage of max. 3100 mA for quick reload.
- 2 USB-charging units.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- Innovative mounting concept.
- Sockets with increased touch protection.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1951165602
EAN	4007123663231
UP	2
Cable length	3 m
Cable designation	H05VV-F 3G1,5
Cable quality	PVC
Socket outlets total	6
Max. current carrying capacity	10 A
USB charging units	2
USB type output socket	Type A
Max. output current USB	3.1 A
Colour	black



Premium-Line Extension Lead

- Robust extension lead, designed to be the best and made of break-resistant special plastic material.
- Illuminated 2-pole ON/OFF safety switch.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- With increased touch protection.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1155225014	1155005014
EAN	4007123023653	4007123044696
UP	2	2
Cable length	1.8 m	1.8 m
Cable designation	H05VV-F 2X1,0	H05VV-F 2X1,0
Cable quality	PVC	PVC
Socket outlets switchable	4	4
Socket outlets total	4	4
Max. current carrying capacity	10 A	10 A
Colour	white	black





EXTENSION LEADS • SURGE PROTECTION

High-End Extension Leads



TECHNICAL DATA

Product number	1155225016	1155005016	1156225016	1156005016
EAN	4007123044733	4007123044719	4007123023752	4007123049387
UP	2	2	2	2
Cable length	3 m	3 m	3 m	3 m
Cable designation	H05VV-F 2X1,0	H05VV-F 2X1,0	H05VV-F 3G1,5	H05VV-F 3G1,5
Cable quality	PVC	PVC	PVC	PVC
Socket outlets switchable	6	6	6	6
Socket outlets total	6	6	6	6
Max. current carrying capacity	10 A	10 A	10 A	10 A
Colour	white	black	white	black



TECHNICAL DATA

Product number	1156225010	1156005010	1156225012	1156005012
EAN	4007123048076	4007123048069	4007123604128	4007123604005
UP	2	2	4	4
Cable length	3 m	3 m	3 m	3 m
Cable designation	H05VV-F 2X1,5	H05VV-F 3G1,5	H05VV-F 3G1,5	H05VV-F 3G1,5
Cable quality	PVC	PVC	PVC	PVC
Socket outlets switchable	10	10	12	12
Socket outlets total	10	10	12	12
Max. current carrying capacity	10 A	10 A	10 A	10 A
Colour	white	black	white	black





Alu-Line 19" Extension Lead For Cabinets

19" wide and 1U tall.

- For installation in 19" network or server cabinets.
- Robust extension leads, designed to be the best and made of aluminium.
- 12x IEC sockets C13.
- IEC plug C14.

19"

TECHNICAL DATA

Product number	1390007112
EAN	4007123662692
UP	1
Cable length	2 m
Cable designation	H05VV-F 3G1,0
Cable quality	PVC
Cold device socket outlets	12
Permanent sockets	12
Socket outlets total	12
Plug system plug	Cold devices
Max. current carrying capacity	10 A
Colour	silver/black



brennenstuhl® estilo Charging Station With Textile Surface

For convenient charging of smartphone, tablet and USB-enabled devices within easy reach.

- Innovative design with textile surface, blends elegantly and discreetly into your home.
- Flexible use, ideal in the living room, bedroom, office or when travelling.
- 1 Euro socket outlet with increased touch protection, max. 2.5 A/575 W.
- 2 USB-charging units.
- Total charging amperage of max. 3100 mA for quick reload.
- 3 m long and flexible power cable with hook-loop cable tie.
- Euro angled plug for small space requirement.

brennenstuhl®
estilo



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1150020010	Socket outlets total	1
EAN	4007123669165	Max. current carrying capacity	2.5 A
UP	1	USB charging units	2
Cable length	3 m	USB type output socket	Type A
Cable designation	H03VVH2-F 2X0,75	Max. output current USB	3.1 A
Permanent sockets	1	Colour	black/anthracite



brennenstuhl® estilo Sofa Socket With Charging Function

For convenient charging of smartphone, tablet and USB-enabled devices within easy reach.

- Shapely and innovative design, can be seamlessly integrated into your furniture.
- Power supply in the immediate vicinity, directly at the sofa, bed or other pieces of furniture, thanks to flexible holding rail to plug in.
- Simply lay the flexible 3m connection cable to the nearest wall socket, discreetly e.g. behind or under the sofa.
- 1 Euro socket outlet with increased touch protection, max. 2.5 A/575 W.
- 2 USB-charging units.
- Total charging amperage of max. 2100 mA for quick reload.
- 3 m long and flexible power cable with hook-loop cable tie.
- Euro angled plug for small space requirement.

brennenstuhl®
estilo



**ENGINEERED IN
GERMANY**




TECHNICAL DATA

Product number	1150290	Socket outlets total	1
EAN	4007123669417	Max. current carrying capacity	2.5 A
UP	1	USB charging units	2
Cable length	3 m	USB type output socket	Type A
Cable designation	H03VVH2-F 2X0,75	Max. output current USB	2.1 A
Permanent sockets	1	Colour	anthracite/grey



Spiral Coiled Tube

- Perfect solution to bundle and protect cables and lines in special surroundings as well as in offices or at home.
- The total length of 2.5m can be individually adjusted.
- Practical winding tool for quick and easy handling included.



TECHNICAL DATA

Product number	1164360
EAN	4007123562381
UP	1
Colour	grey



Cable Reels • Cable Boxes



Garant® CEE 3 IP44 industrial/construction site cable reel

For permanent outdoor use, IP 44.

- In accordance with EN 61316.
- Reel body made of special plastic on galvanised support frame.
- Innovative "cablepilot" carrying handle for perfect cable routing. Swings on both sides for easy carrying and hanging.
- With twist handle for convenient retraction.
- RN cable is approved for difficult building conditions in accordance with VDE 0100 Part 704.
- CEE plug 400 V/16 A,
 - 2 CEE socket 400 V/16 A,
 - 1 CEE socket 230 V/16 A.
- With 3-pole safety cut-out and overheating protection.
- With reel brake.
- Category 2 equipment (K2 DGUV 203-005): For use in harsh operating conditions with high mechanical, physical and chemical influences.



**MADE IN
GERMANY**

**+ cable
Pilot**



TECHNICAL DATA

Product number	1238020
EAN	4007123688517
UP	1
Cable length	30 m
Cable designation	H07RN-F 5G2,5
Cable quality	Rubber-Neoprene
Cable colour	black
Reel diameter	320 mm
Plug system plug	CEE 16A 3P+N+E (5p) 400V
Max. current carrying capacity	16 A
Degree of protection (IP)	IP44



Garant® CEE 1 IP 44 Cable Reel for Site & Industry

For universal outdoor use according to BGI 608 and use permanent on sites, IP 44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle "cable pilot" for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Category 2 (K2) equipment: Use for rough operation with high mechanical, physical and chemical effects.
- RN cable is approved to exacting site standards as per VDE 0100 part 704.
- 1 CEE-plug 400 V/16 A,
 - 1 CEE-socket 400 V/16 A,
 - 2 water-jet protected sockets 230 V.
- Earthed sockets connected to separate phases.
- With 3-pin safety cut-out and thermal overload protection.
- Danish Standard.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1237988501
EAN	4007123061471
UP	1
Cable length	30 m
Cable designation	H07RN-F 5G2,5
Cable quality	Rubber-Neoprene
Cable colour	black
Reel diameter	320 mm
Plug system plug	CEE 16A 3P+N+E (5p) 400V
Max. current carrying capacity	16 A
Degree of protection (IP)	IP44



Garant CEE IP44 cable reel

For use on construction sites and permanent outdoor use, IP44.

- According to EN 61316.
- Reel body made of special plastic on galvanised carrying frame.
- Innovative "cablepilot" carrying handle for perfect cable routing. Swings on both sides for easy carrying and hanging.
- With twist handle for convenient retraction.
- CEE plug 400 V/16 A,
 - 1 CEE socket 400 V/16 A,
 - 2 splash-proof 230 V protective contact sockets.
- Cable quality: RN cable, very robust and oil-resistant.
- RN cable is approved for difficult building conditions in accordance with VDE 0100 Part 704.
- Sockets with earthing contact distributed over separate phases.
- With 3-pole safety cut-out and overheating protection.
- With drum brake.
- Category 2 equipment (K2 DGUV 203-005): For use in harsh operating conditions with high mechanical, physical and chemical impacts in accordance with EN 61316.



**MADE IN
GERMANY**

**+ cable
Pilot**



TECHNICAL DATA

Product number	1182778502
EAN	4007123687473
UP	1
Cable length	20 m
Cable designation	H07RN-F 5G2,5
Cable quality	Rubber-Neoprene
Cable colour	signal red
Reel diameter	300 mm
Plug system plug	CEE 16A 3P+N+E (5p) 400V
Max. current carrying capacity	16 A
Degree of protection (IP)	IP44

**Garant® CEE 2 IP 44 Camping/Maritime Cable Reel**

For camping and permanent outdoor use, IP44.

- Reel body made of special plastic on galvanised carrying frame.
- Innovative "cablepilot" carrying handle for perfect cable routing. Swings on both sides for easy carrying and hanging.
- With twist handle for convenient retraction.
- The RN cable is very robust, oil-resistant and particularly suitable for professional use.
- Cable in signal colour orange, helpful to prevent potential tripping hazards.
- CEE plug 230 V/16 A,
 - 2 CEE sockets 230 V/16 A.
- With 1-pole safety cut-out and overheating protection.

**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1182760100
EAN	4007123673988
UP	1
Cable length	25 m
Cable designation	H07RN-F 3G2,5
Cable quality	Rubber-Neoprene
Cable colour	orange
Reel diameter	290 mm
Plug system plug	CEE 16A 2P+E (3p) 230V
Max. current carrying capacity	16 A
Degree of protection (IP)	IP44

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1510010	4007123683192	Transport and storage bag for cable reels	1182760100



Garant® Bretec® IP 44 Cable Reel

- The Bretec® rotary contact system allows the cable reel to be rolled up or unrolled without the connected cables twisting.
- Drum body made of special plastic on galvanised carrying frame.
- Innovative carrying handle "cablepilot" for perfect cable guidance. Swings on both sides for convenient carrying and hanging.
- With twist handle for convenient rolling up.
- 4 protective contact sockets with self-closing lids.
- With overheating protection.



**MADE IN
GERMANY**

**+ cable
Pilot**



TECHNICAL DATA

Product number	1208948501
EAN	4007123630318
UP	1
Cable length	25 m
Cable designation	AT-N05V3V3-F 3G1,5
Cable quality	BREMAXX
Cable colour	blue
Reel diameter	240 mm
Plug system plug	Type K (DK)
Max. current carrying capacity	13 A
Degree of protection (IP)	IP44

**Garant® IP 44 Cable Reel**

Practical and suitable for outdoor use, IP 44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle "cable pilot" for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- The BREMAXX®-cable is extremely sturdy, applicable down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- 4 water-jet protected earthed socket outlets with self-closing protective caps.
- With safety cut-out.
- Sockets with protection against contact.
- Danish Standard.

**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1218378501	1208478501
EAN	4007123114696	4007123114726
UP	1	1
Cable length	25 m	40 m
Cable designation	AT-N05V3V3-F 3G1,5	AT-N05V3V3-F 3G1,5
Cable quality	BREMAXX	BREMAXX
Cable colour	blue	blue
Reel diameter	240 mm	290 mm
Plug system plug	Type K (DK)	Type K (DK)
Max. current carrying capacity	13 A	13 A
Degree of protection (IP)	IP44	IP44



Garant® IP 44 Cable Reel

For short-term outdoor use, IP44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Rotary handle for comfortable rolling up.
- 4 earthed sockets with protective caps.
- With safety cut-out.
- The cable drum with innovative carrying handle “cablepilot” enables perfect cable routing. Swings on both sides and enables convenient carrying and hanging.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1118118501	1118128501
EAN	4007123677214	4007123677221
UP	1	1
Cable length	20 m	40 m
Cable designation	H05RR-F 3G1,5	H05RR-F 3G1,5
Cable quality	Rubber	Rubber
Cable colour	black	black
Reel diameter	240 mm	240 mm
Plug system plug	Type K (DK)	Type K (DK)
Max. current carrying capacity	13 A	10 A
Degree of protection (IP)	IP20	IP20

**Garant® Cable Reel**

For indoor use, IP20.

- Drum body made of special plastic on galvanised carrying frame.
- With overheating protection.
- Sockets with increased contact protection.
- With 10A plug.

**MADE IN
GERMANY****TECHNICAL DATA**

Product number	1118098501	1118108501
EAN	4007123677191	4007123677207
UP	1	1
Cable length	20 m	40 m
Cable designation	H05VV-F 2X1,0	H05VV-F 2X1,0
Cable quality	PVC	PVC
Cable colour	black	black
Reel diameter	240 mm	240 mm
Plug system plug	Type K (DK)	Type K (DK)
Max. current carrying capacity	10 A	10 A
Degree of protection (IP)	IP20	IP20

**Transport and storage bag for cable reels**

For perfect protection on construction sites or the campsite.

- Storage bag made of dust- and splash-proof material.
- Easy-care, washable and all-weather.
- 2-way zip with zip puller so that the bag can be opened from both sides.
- Dimensions: 26x30x37,5cm.

**TECHNICAL DATA**

Product number	1510010
EAN	4007123683192
UP	1



Garant® G CEE 3 IP 44 Camping/Maritime Cable Reel

For camping and permanent outdoor use, IP 44.

- CEE angle coupling 230 V/16 A including earthing contact combination socket 230 V with self-closing caps + 230 V/16 A CEE plug.
- Extension cable reel with plug and coupling.
- Innovative and ergonomic cable guide handle "cable pilot" for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Belt fixation for effortless winding and unwinding of the cable.
- The RN cable is very robust, oil-resistant and particularly suitable for professional use.
- Cables in signal colour orange, helpful to prevent potential tripping hazards.
- Thermal cut-out protection, indicator shows overheating or overloading.



**MADE IN
GERMANY**

**+ cable
Pilot**



TECHNICAL DATA

Product number	1182470100
EAN	4007123673797
UP	1
Cable length	23 m + 2 m
Cable designation	H07RN-F 3G2,5
Cable quality	Rubber-Neoprene
Cable colour	orange
Reel diameter	290 mm
Plug system plug	CEE 16A 2P+E (3p) 230V
Max. current carrying capacity	16 A
Degree of protection (IP)	IP44

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1510010	4007123683192	Transport and storage bag for cable reels	1182470100



Vario-Line Cable Box

- Housing made of break-resistant plastic.
- Practical carrying handle.
- Twin feet ensure excellent stability.
- 4 socket outlets.
- With safety cut-out.
- Sockets with increased touch protection.





**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1118558501	1118208501
EAN	4007123064151	4007123064168
UP	5	5
Cable length	10 m	20 m
Cable designation	H05VV-F 2X1,0	H05VV-F 2X1,0
Cable quality	PVC	PVC
Cable colour	black	black
Plug system plug	Type K (DK)	Type K (DK)
Max. current carrying capacity	10 A	10 A
Degree of protection (IP)	IP20	IP20
Colour	light grey/black	light grey/black

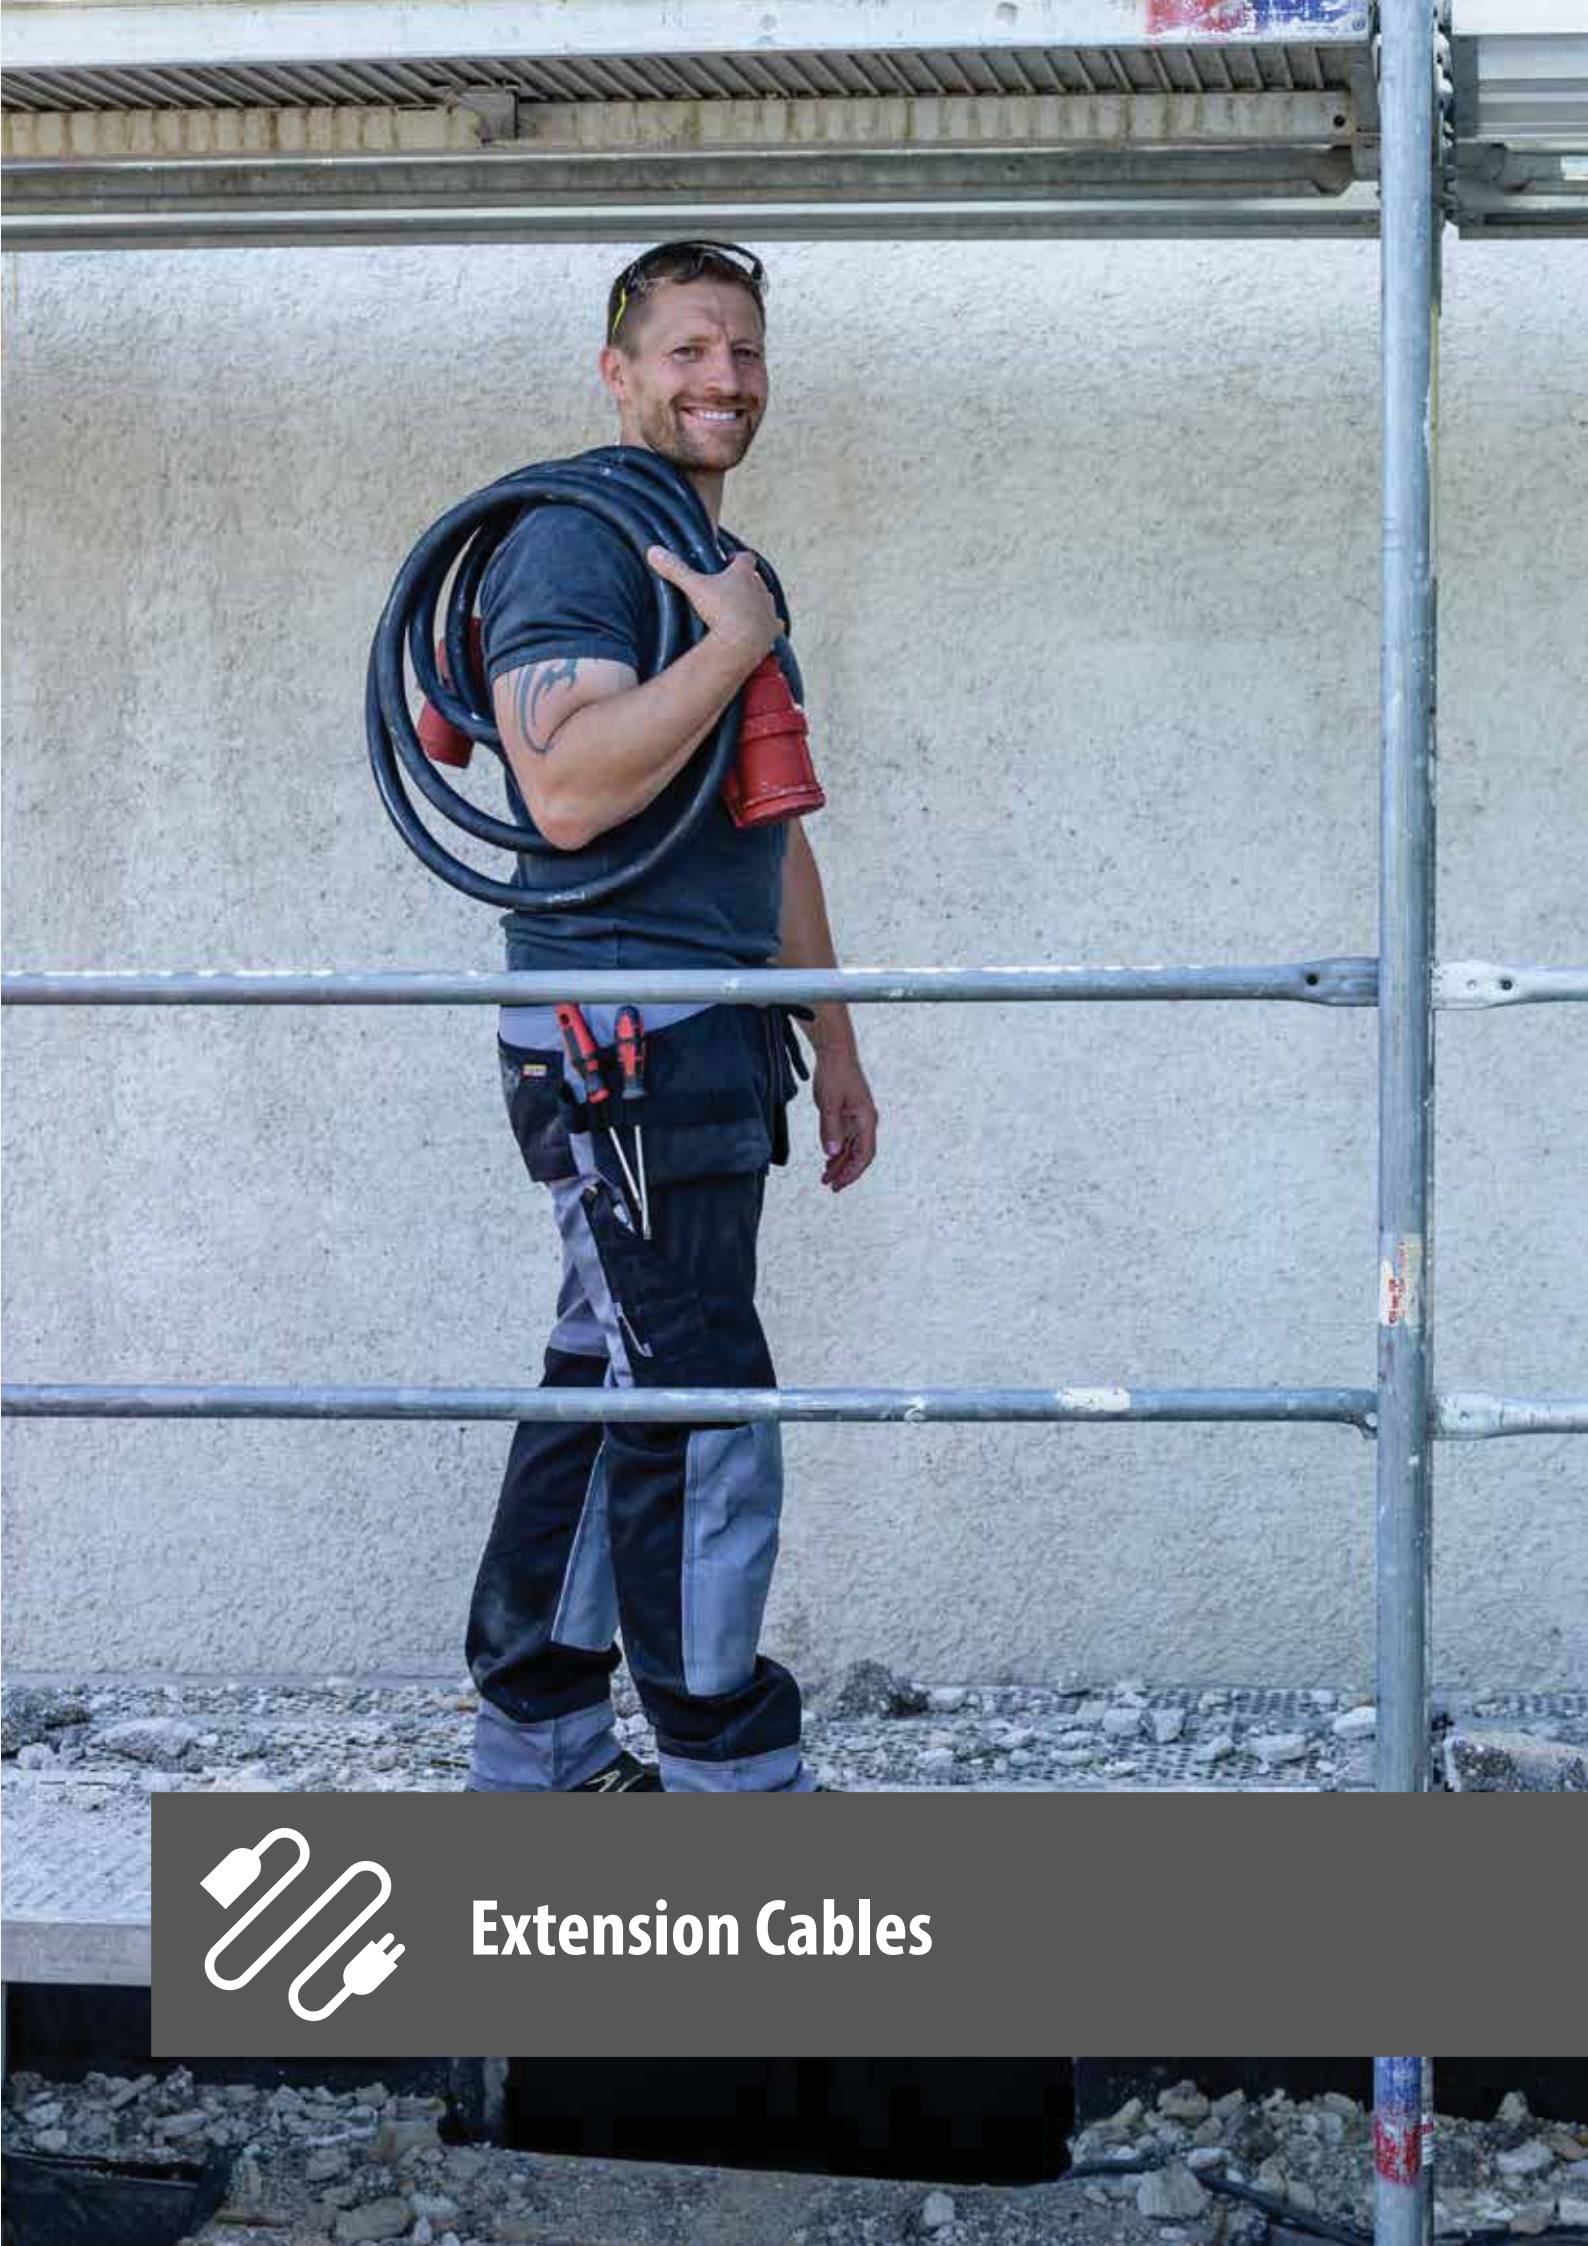

Extension Cables

**Professional CEE extension cable IP 44****with phase inverter**

For use on site or permanent outdoor use. Protected against splashing water, IP 44.

- Ideal for hard outdoor use.
- Oil resistant rubber cable for permanent outside use.
- High-quality, impact-resistant CEE phase inverter and CEE coupling with cap.
- By turning two plug contacts, the phase sequence can be changed and thus adjusted.

PROFESSIONAL**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1169370100	1169390100	1169370250	1169390250
EAN	4007123664689	4007123667277	4007123664696	4007123667284
UP	1	1	1	1
Cable length	10 m	10 m	25 m	25 m
Cable designation	H07RN-F 5G2,5	H07RN-F 5G4,0	H07RN-F 5G2,5	H07RN-F 5G4,0
Cable quality	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene
Cable colour	black	black	black	black
Connection	CEE coupling/CEE phase inverter	CEE coupling/CEE phase inverter	CEE coupling/CEE phase inverter	CEE coupling/CEE phase inverter
Plug system plug	CEE 16A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V
Degree of protection (IP)	IP44	IP44	IP44	IP44



Professional CEE Extension Cable IP 44

For universal outdoor use and permanent use on sites, IP 44.

- Ideal for hard outdoor use.
- Oil resistant rubber cable for permanent outside use.
- High-quality, impact-resistant CEE plug and CEE coupling with cap.






PROFESSIONAL








**MADE IN
GERMANY**



TECHNICAL DATA

					
Product number	1167710	1167740	1167970	1167320100	1167630100
EAN	4007123005796	4007123018239	4007123029112	4007123667819	4007123664634
UP	1	1	1	1	1
Cable length	10 m	10 m	10 m	10 m	10 m
Cable designation	H07RN-F 5G1,5	H07RN-F 5G2,5	H07RN-F 5G4,0	H07RN-F 5G6,0	H07RN-F 5G16,0
Cable quality	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene
Cable colour	black	black	black	black	black
Connection	CEE coupling/CEE plug	CEE plug/CEE coupling	CEE coupling/CEE plug	CEE coupling/CEE plug	CEE coupling/CEE plug
Plug system plug	CEE 16A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V	CEE 63A 3P+N+E (5p) 400V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V	CEE 1x 63A 3P+N+E (5p) 400V
Degree of protection (IP)	IP44	IP44	IP44	IP44	IP44

TECHNICAL DATA

					
Product number	1167630200	1167720	1168500	1167320250	1167730
EAN	4007123664641	4007123021550	4007123190867	4007123667826	4007123005826
UP	1	1	1	1	1
Cable length	20 m	25 m	25 m	25 m	30 m
Cable designation	H07RN-F 5G16,0	H07RN-F 5G2,5	H07RN-F 5G4,0	H07RN-F 5G6,0	H07RN-F 5G1,5
Cable quality	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene
Cable colour	black	black	black	black	black
Connection	CEE coupling/CEE plug	CEE plug/CEE coupling	CEE coupling/CEE plug	CEE coupling/CEE plug	CEE plug/CEE coupling
Plug system plug	CEE 63A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V	CEE 32A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V
Plug system CEE socket/ CEE coupling	CEE 1x 63A 3P+N+E (5p) 400V	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V	CEE 1x 32A 3P+N+E (5p) 400V	CEE 1x 16A 3P+N+E (5p) 400V
Degree of protection (IP)	IP44	IP44	IP44	IP44	IP44



Industry CEE Extension Cable IP 44

Practical and suitable for outdoor use, IP 44.

- The RN cable is very robust, oil-resistant and particularly suitable for professional use.

The L/N polarity is not defined for the adapter cables with earthing contact plug!



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1167650110
EAN	4007123650781
UP	2
Cable length	10 m
Cable designation	H07RN-F 3G1,5
Cable quality	Rubber-Neoprene
Cable colour	black
Connection	CEE plug/CEE coupling
Plug system plug	CEE 16A 2P+E (3p) 230V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 2P+E (3p) 230V
Degree of protection (IP)	IP44



BREMAXX® CEE Extension Cable IP 44

Practical and suitable for outdoor use, IP 44.

- The BREMAXX®-cable is extremely sturdy, applicable down to -35°C, oil- and UV-resistant and highly abrasion-resistant.
- Excellent abrasion resistance.
- High-quality, impact-resistant CEE plug and CEE coupling with cap.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1168580	1168590
EAN	4007123151929	4007123151936
UP	1	1
Cable length	10 m	25 m
Cable designation	AT-N07V3V3-F 5G1,5	AT-N07V3V3-F 5G1,5
Cable quality	BREMAXX	BREMAXX
Cable colour	signal red	signal red
Connection	CEE plug/CEE coupling	CEE plug/CEE coupling
Plug system plug	CEE 16A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 3P+N+E (5p) 400V	CEE 1x 16A 3P+N+E (5p) 400V
Degree of protection (IP)	IP44	IP44



CEE Extension Cable IP44 For Camping/Maritim with CEE angled coupling

For camping and permanent outdoor use. Splash-proof, IP 44.

- CEE angle coupling 230 V/16 A including protective contact combination socket 230 V with self-closing cover + 230 V/16 A CEE plug.
- The RN cable is very robust, oil-resistant and particularly suitable for professional use.
- Cable in signal colour orange, helpful to prevent potential tripping hazards.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1132920525	1167650510	1167650525
EAN	4007123673858	4007123673865	4007123673872
UP	1	2	2
Cable length	1.5 m	10 m	25 m
Cable designation	H07RN-F 3G2,5	H07RN-F 3G2,5	H07RN-F 3G2,5
Cable quality	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene
Cable colour	orange	orange	orange
Connection	CEE plug/CEE angle coupling	CEE plug/CEE angle coupling	CEE plug/CEE angle coupling
Plug system plug	CEE 16A 2P+E (3p) 230V	CEE 16A 2P+E (3p) 230V	CEE 16A 2P+E (3p) 230V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 2P+E (3p) 230V	CEE 1x 16A 2P+E (3p) 230V	CEE 1x 16A 2P+E (3p) 230V
Degree of protection (IP)	IP44	IP44	IP44

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1510020	4007123683901	Transport and storage bag for extension cable	1167650510, 1167650525



CEE Extension Cable IP 44 For Camping/Maritime

For camping and permanent outdoor use. Splash-proof, IP 44.

- The RN cable is very robust, oil-resistant and particularly suitable for professional use.
- Cable in signal colour orange, helpful to prevent potential tripping hazards.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1167650605	1167650610	1167650625
EAN	4007123673926	4007123673940	4007123673957
UP	2	2	2
Cable length	5 m	10 m	25 m
Cable designation	H07RN-F 3G2,5	H07RN-F 3G2,5	H07RN-F 3G2,5
Cable quality	Rubber-Neoprene	Rubber-Neoprene	Rubber-Neoprene
Cable colour	orange	orange	orange
Connection	CEE plug/CEE coupling	CEE plug/CEE coupling	CEE plug/CEE coupling
Plug system plug	CEE 16A 2P+E (3p) 230V	CEE 16A 2P+E (3p) 230V	CEE 16A 2P+E (3p) 230V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 2P+E (3p) 230V	CEE 1x 16A 2P+E (3p) 230V	CEE 1x 16A 2P+E (3p) 230V
Degree of protection (IP)	IP44	IP44	IP44

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1510020	4007123683901	Transport and storage bag for extension cable	1167650605, 1167650610, 1167650625



EXTENSION CABLES

Extension Cables



Camping/Maritime Adapter Cable IP 44

For camping, farming, maritime/yachting, construction sites and permanent outdoor use. Splash-proof, IP 44.

- The RN cable is very robust, oil-resistant and particularly suitable for professional use.
- Cable in signal colour orange, helpful to prevent potential tripping hazards.
- Adapter cable with CEE plug and CEE coupling with self-closing cover.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1132970025
EAN	4007123687046
UP	1
Cable length	1.5 m
Cable designation	H07RN-F 3G2,5
Cable quality	Rubber-Neoprene
Cable colour	orange
Connection	CEE coupling/CEE plug
Plug system plug	CEE 16A 3P+E (4p) 400V
Plug system CEE socket/ CEE coupling	CEE 1x 16A 2P+E (3p) 230V
Degree of protection (IP)	IP44



Transport and storage bag for extension cable

For perfect protection on construction sites or the campsite.

- Storage bag made of dust- and splash-proof material.
- Easy-care, washable and all-weather.
- 2-way zip with zip puller so that the bag can be opened from both sides.
- Dimensions: 37x37x13cm.



TECHNICAL DATA

Product number	1510020
EAN	4007123683901
UP	1



Plastic Extension Cable

For normal use in dry conditions, IP 20.

- With Euro plug and socket.
- Flat cable for connecting appliances with a max. of 2.5 A.
- With increased touch protection.



TECHNICAL DATA

Product number	1161790	1161660	1161800	1161670
EAN	4007123249732	4007123116980	4007123249749	4007123150397
UP	10	10	10	10
Cable length	3 m	3 m	5 m	5 m
Cable designation	H03VVH2-F 2X0,75	H03VVH2-F 2X0,75	H03VVH2-F 2X0,75	H03VVH2-F 2X0,75
Cable colour	black	white	black	white
Connection	Euro plug/Euro coupling	Euro plug/Euro coupling	Euro plug/Euro coupling	Euro plug/Euro coupling
Plug system plug	Type C (euro plug)	Type C (euro plug)	Type C (euro plug)	Type C (euro plug)
Plug system socket/ coupling	Type C (euro plug)	Type C (euro plug)	Type C (euro plug)	Type C (euro plug)
Degree of protection (IP)	IP20	IP20	IP20	IP20



Power Distributor



Energy Station CEE 1 IP 44

- Ideal for hard outdoor use.
- Casing made of break-resistant special plastic.
- Practical winding system for protection of cable.
- Also suitable for wall-fixing.
- Danish Standard.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1151608501
EAN	4007123093458
UP	3
Cable length	2 m
Cable designation	H07RN-F 5G1,5
Cable quality	Rubber-Neoprene
Cable colour	black
Degree of protection (IP)	IP44
CEE socket - 16A	CEE 1x 16A 3P+N+E (5p) 400V
Plug system socket	Type K (DK)
Supply/ connection option	Supply cable with plug
Plug system plug	CEE 16A 3P+N+E (5p) 400V
Max. current carrying capacity	16 A



Compact Rubber Power Distributor BSV 3 2/32

For universal outdoor use and permanent use on sites, IP 44.

- Splash-proof housing made of a special rubber compound for continuous use.
- Extremely robust, impact-resistant, resistant to ageing and weathering.
- Resistant to various oils, greases, petrol and acids, UV and ozone radiation.
- Temperature resistance of the housing -30 °C to +80 °C.
- Quality sockets in accordance with VDE 0620-2-1.
- Sturdy metal carrying handle.
- Oil-resistant rubber cable for permanent outdoor use.
- 2 CEE 400V/32A 5-pin sockets.



**MADE IN
GERMANY**



TECHNICAL DATA

Product number	1153680200
EAN	4007123686995
UP	1
Cable length	2 m
Cable designation	H07RN-F 5G6,0
Cable quality	Rubber-Neoprene
Cable colour	black
Degree of protection (IP)	IP44
CEE socket - 32A	CEE 2x 32A 3P+N+E (5p) 400V
Supply/ connection option	Supply cable with plug
Plug system plug	CEE 32A 3P+N+E (5p) 400V
Max. current carrying capacity	32 A



Cross Distributor CEE 400V IP44

Suitable for permanent outdoor use, construction sites and agricultural operations, IP 44.

- Housing made of robust special plastic.
- Robust and functional cross-connect with a hanger.
- Versatile application possibilities.
- With safety flap lid.



TECHNICAL DATA

Product number	1081670	1081640
EAN	4007123670345	4007123285846
UP	1	1
Degree of protection (IP)	IP44	IP44
CEE socket - 16A		CEE 3x 16A 3P+N+E (5p) 400V
CEE socket - 32A	CEE 3x 32A 3P+N+E (5p) 400V	
Supply/ connection option	Attachment plug	Attachment plug
Plug system plug	CEE 32A 3P+N+E (5p) 400V	CEE 16A 3P+N+E (5p) 400V
Max. current carrying capacity	32 A	16 A



Weather protection box IP54

Ideal protection against humidity and moisture for electrical connections even outdoors.

- Weather protection box for safe power supply in the garden and for outdoor use.
- Suitable for connecting e.g. Christmas lights and decorative lights, pumps/UV filters and pond lighting.
- Multiple cable inlets and outlets which provide a high level of protection against dust and moisture due to the insulation.
- Hooks for wall mounting.
- Velcro tape supplied for attaching a extension lead to the inside of the enclosure.
- Hinged lid is closed by a locking mechanism.



TECHNICAL DATA

Product number	1160530
EAN	4007123673896
UP	1



Safe-Box BIG IP 44

For extra safety when connecting cables, even outdoors, IP 44.

- Extra large Safe-Box for safe connection of plug and socket and to protect from damp.
- Ideal for particularly large plugs and sockets, especially larger export versions.
- Most suitable for use when camping, mowing the lawn, for seasonal or Christmas lighting, or when working with electrical equipment outdoors.



TECHNICAL DATA

Product number	1160440
EAN	4007123170784
UP	10



ACCESSORIES

Extension Socket Inlay • Safe-Box



Safe-Box

For additional safety when connecting extension cables.

- Ideal protection against accidental disconnection of the plug connection, as well as from dirt and damage.
- Most suitable for working with electrical equipment that require an extension cable.

TECHNICAL DATA

Product number	1160400
EAN	4007123112036
UP	10



Smoke & Hazard Detectors



Smoke detector RM L 3101

Clever protection and maximum security throughout the home.

- All interconnected wireless smoke detectors sound when an alarm is triggered.
- Suitable for wireless networking of up to 40 smoke alarms.
- 3 V lithium battery permanently installed in the device for constant functional reliability.
- Increased stability, e.g. against external influences.
- Quality seal "Q" - Smoke alarm device fulfils the increased requirements of guideline 14-01 of the vfdb.
- Tested according to DIN EN 14604.
- Penetrating alarm signal 85 dB.
- Visual indication of function, with test button for function testing.
- Visual and audible low battery signal.
- Includes mute function in case of false alarm and "do not disturb" function in case of low battery.
- Mounting material included.



TECHNICAL DATA

Product number	1290210
EAN	4007123679188
UP	1
Volume	85 dB(A)
Number of batteries	1
Battery type	CR 17450
Battery technology	Lithium
Radio frequency	868 MHz
Wireless range	100 m
Colour	white
Dimension LxWxH	4 cm x 11,5 cm x 11,5 cm

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1290000	4007123637096	Magnet Assembly Plate BR 1000 for smoke detector	1290210



Smoke Detector RM L 3100

Particularly suitable for long-term use.

- VdS tested according to DIN EN 14604.
- Smoke detector with quality seal "Q", complies to the increased demands of regulations 14-01 vfdb.
- With approved long-life cycle and reduction of false alarm signals.
- Increased stability against outer effect.
- 3 V lithium battery fixed in devices for constant operational readiness.
- Optical function display, with test button for the functional check.
- Includes mute function for false alarm and "Do not disturb function" for low battery level.
- Shrill alarm - 85 dB.
- Optical and acoustic signal when the battery is low.
- Includes mounting materials.



TECHNICAL DATA

Product number	1290050
EAN	4007123631636
UP	1
Volume	85 dB(A)
Number of batteries	1
Battery type	CR 123A
Battery technology	Lithium
Colour	white
Dimension LxWxH	3,1 cm x 10 cm x 10 cm

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1290000	4007123637096	Magnet Assembly Plate BR 1000 for smoke detector	1290050





Smoke Detector RM C 9010

Smoke alarms save lives! More safety for you, your family and your property!

- Photoelectric detector, tested in accordance with EN 14604.
- Optical function display, with test button for the functional check.
- Shriill alarm - 85 dB.
- Acoustic signal when the battery is low.
- Includes nine-volt battery. Service life at least 1 year.
- Includes mounting materials.



TECHNICAL DATA

Product number	1290080
EAN	4007123640911
UP	1
Volume	85 dB(A)
Number of batteries	1
Battery type	E-Block 6F22/ 6LR61
Colour	white
Dimension LxWxH	3,5 cm x 10 cm x 10 cm

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1290000	4007123637096	Magnet Assembly Plate BR 1000 for smoke detector	1290080



Magnet Assembly Plate BR 1000 for Smoke Detector

- Mounting your smoke alarm without drilling, screwing or noise.
- No damage to the ceiling or cables/ducts.
- Very easy and fast assembly with two self-adhesive magnetic plates.
- Easy to remove the smoke alarm (for tests, replacing the battery, etc.).
- Not suitable for vinyl wallpapers, styrofoam, non-stick coated, siliconized or Teflon-coated surface. Only limitedly suitable for smoke alarms with a diameter of less than 8 cm.



TECHNICAL DATA

Product number	1290000
EAN	4007123637096
UP	1
Dimension LxWxH	7 cm x 7 cm x 0,1 cm



Devices for Home & Workshop



Moisture Detector MD

- To determine the moisture content of wood or building material, such as, e.g. concrete, brick, screed, plasterboard, wallpaper, etc.
- Measurement range of 5 - 50 % for wood, or 1.5 - 33 % for building material.
- Display on a large LCD display (in percent, resolution 0.1 %) as well as acoustically (can be deactivated).
- Practical "hold" function also makes measurement possible at locations difficult to access.
- Automatic switch-off approx. 3 mins, after last application.
- Battery low voltage display.
- Robust, ergonomic housing with separate compartment for 9 V monobloc battery (not included).
- With protective cap.



TECHNICAL DATA

Product number	1298680
EAN	4007123249893
UP	1
Dimension LxWxH	15 cm x 6,5 cm x 2,5 cm



Compressor Hose Reel Anti Twist

With axial connection permitting rolling up or out during operation.

- With high-quality fabric hose, oil resistant.
- Up to 15 bar of pressure.
- Throughflow system, axial connection permitting it to be rolled up or out, even during operation.
- With quick release couplings (DIN), connection hose, and wall mounting.
- reel is made of special highly breakproof plastic.
- Frame made of steel tubing with bright galvanised zinc coating.



**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1127010	1127030
EAN	4007123001385	4007123002481
UP	1	1
Hose length	20 m	20 m
Operating pressure	15 bar	15 bar
Inner diameter	6 mm (1/4")	9 mm (3/8")
Outer diameter	12 mm	15 mm
Fittings	DIN	DIN
Reel diameter	290 mm	290 mm



Compressor Hose Reel Standard

- With high-quality fabric hose, oil resistant.
- Up to 15 bar of pressure.
- Complete with quick release couplings (DIN).
- reel is made of special highly breakproof plastic.
- Frame made of steel tubing with bright galvanised zinc coating.



**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1127020
EAN	4007123001392
UP	1
Hose length	20 m
Operating pressure	15 bar
Inner diameter	6 mm (1/4")
Outer diameter	12 mm
Fittings	DIN
Reel diameter	290 mm



Water Hose Reel

The light, practical and mobile water hose extension.

- Special hose with textile inlay and spiral wound cross-weave.
- Flexible and pressure-resistant.
- With a spraying nozzle with waterstop and a top connector.
- Drum is made of special highly breakproof plastic.
- Strong carrying frame made of galvanized tubular steel.
- Easy to wind and rewind.




**MADE IN
GERMANY**

TECHNICAL DATA

Product number	1237130
EAN	4007123670338
UP	1
Hose length	20 m
Inner diameter	13 mm (1/2")
Reel diameter	320 mm





**Construction Floodlights •
Work Lights • Tripods**



Professional Multi Battery Hybrid Tripod LED floodlight three-head 8050 MH

Maximum flexibility. Full compatibility with leading battery technologies.

- Compatible with various 18V rechargeable batteries (different Ah classes) from the power tool manufacturers Bosch Professional, Dewalt, Einhell, Fein, Festool, Flex, Hikoki, Makita, Metabo CAS, Milwaukee and Würth.
- brennenstuhl® is part of AMPShare - Powered by Bosch Professional: The AMPShare battery alliance enables the use of Brennenstuhl work lights with 18V rechargeable batteries from Bosch Professional.
- LED construction spotlights incl. 4 interface adapters for the 5 brands Bosch Professional, Dewalt, Makita, Metabo CAS and Milwaukee.
- More flexibility thanks to hybrid technology: battery and mains operation possible, automatic switchover from mains to battery in the event of a power failure.
- Hybrid floodlight with plug-in cable connection, 5m detachable cable H07RN-F 2X1.0.
- Three individually rotatable spotlight elements for 360° illumination of the working environment.
- Height-adjustable spotlight head up to 2.2m and tiltable.
- With 4 switching levels (100% - 75% - 50% - 25%).
- Fully collapsible tripod light: Only 105cm long when folded.
 - With 3 sturdy feet.
- Protection system for Power-Tool batteries: The batteries used are protected against deep discharge and overheating (caused by high load currents).
- Bluetooth control via the free BT-Control app from brennenstuhl®.
- Functions include switching on and off, brightness setting, grouping (several spotlights can be controlled simultaneously) and automatic switch-off via a countdown timer.
- Switching on and off as well as brightness adjustment conveniently via the app.
- Category 2 (K2) operating equipment: Used for harsh operating conditions with high mechanical, physical and chemical impacts.

PROFESSIONAL

brennenstuhl®
MULTI BATTERY
18V-SYSTEM



Bluetooth®



Powered by



ENGINEERED IN GERMANY



TECHNICAL DATA

Product number	1173700010
EAN	4007123692040
UP	1
Luminous flux	8400 lm
Power consumption	60 W
Colour temperature	6500 K
Min.-Max. Nominal input voltage	220 V - 240 V
Cable length	5 m
Cable designation	H07RN-F 2X1,0
Cable quality	Rubber-Neoprene
Min.-max. height adjustable	103 cm - 220 cm
Impact strength	IK08
Protection class	II
Degree of protection (IP)	IP54
Colour	black/grey



Professional Multi Battery LED Spotlight

Maximum flexibility. Full compatibility with leading battery technologies.

- Compatible with various 18V batteries (different Ah classes) from the 11 power tool manufacturers: Bosch Professional, Dewalt, Einhell, Fein, Festool, Flex, Hikoki, Makita, Metabo CAS, Milwaukee und Würth.
- Work spotlight including interface adapters for 5 manufacturers (Bosch Professional, Dewalt, Makita, Metabo CAS, Milwaukee).
- brennenstuhl® is part of AMPShare - Powered by Bosch Professional: The AMPShare battery alliance enables the use of Brennenstuhl work lamps with the 18V batteries from Bosch Professional.
- Switch with function: 100% - 75% - 50% - 25% light.
- Light duration depending on the battery used.
- Battery status display for the remaining energy of the battery used, the batteries are to be charged externally.
- Protection system for Power-Tool batteries: The batteries used are protected against deep discharge and overheating (caused by high load currents).
- Removable battery protection cover.
- LED spotlight with anti-tilt protection, protects lens and housing of the spotlight.
- Die-cast aluminium housing and rubber coating to protect the housing.
- LED spotlight with on/off switch and ergonomic handle also allows tripod mounting.
- Category 2 (K2) equipment: Use for rough operation with high mechanical, physical and chemical impacts.

PROFESSIONAL

brennenstuhl®
MULTI BATTERY
18V-SYSTEM



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173140400
EAN	4007123676613
UP	1
Luminous flux	4500 lm
Power consumption	40 W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	18 V
Lifetime	30000 h
Battery voltage	18 V
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP65
Colour	black

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1173140400
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1173140400
1172640066	4007123676071	Adapter Milwaukee/Dewalt for LED work light in the brennenstuhl® Multi Battery 18V System	1173140400
1172640064	4007123677979	Makita adapter for LED work light in the brennenstuhl® Multi Battery 18V System	1173140400
1172640063	4007123677948	Adapter Bosch Professional for LED work light in the brennenstuhl® Multi Battery 18V System	1173140400
1172640065	4007123677986	Adapter Metabo CAS for LED work light in the brennenstuhl® Multi Battery 18V System	1173140400
1172640082	4007123685639	Universal magnetic holder MH 1	1173140400



Professional Multi Battery LED Rechargeable Work Light

Maximum flexibility. Full compatibility with leading battery technologies.

- Compatible with various 18V rechargeable batteries (different Ah classes) from the 11 power tool manufacturers: Bosch Professional, Dewalt, Einhell, Fein, Festool, Flex, Hikoki, Makita, Metabo CAS, Milwaukee and Würth.
- Work spotlight including interface adapters for 5 manufacturers (Bosch Professional, Dewalt, Makita, Metabo CAS, Milwaukee).
- brennenstuhl® is part of AMPShare - Powered by Bosch Professional: The AMPShare battery alliance enables the use of Brennenstuhl work lamps with the 18V batteries from Bosch Professional.
- With 4 switching levels (100% - 75% - 50% - 25%), direct full power when switched on.
- Battery status display for the remaining energy of the battery used, the batteries can be charged externally.
- Protection system for Power-Tool batteries: The batteries used are protected against deep discharge and overheating (caused by high load currents).
- Removable battery protection cover.
- LED spotlight with anti-tilt protection, protects working light and spotlight housing.
- Sturdy housing for safe use.
- Ergonomic handle.
- With on/off switch.
- Tripod mounting possible.
- Category 2 (K2) equipment: Use for rough operation with high mechanical, physical and chemical effects.

PROFESSIONAL

brennenstuhl®

MULTI BATTERY
18V-SYSTEM



Powered by **BOSCH**



GERMAN
INNOVATION
AWARD 2022
GOLD

DESIGN PLUS
powered by: light+building
2022



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173700007
EAN	4007123681907
UP	1
Luminous flux	3150 lm
Power consumption	27 W
Luminous efficacy	116 lm/W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	18 V
Lifetime	30000 h
Battery voltage	18 V
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP65
Colour	black/grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1173700007
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1173700007
1172640066	4007123676071	Adapter Milwaukee/Dewalt for LED work light in the brennenstuhl® Multi Battery 18V System	1173700007
1172640064	4007123677979	Makita adapter for LED work light in the brennenstuhl® Multi Battery 18V System	1173700007
1172640063	4007123677948	Adapter Bosch Professional for LED work light in the brennenstuhl® Multi Battery 18V System	1173700007
1172640065	4007123677986	Adapter Metabo CAS for LED work light in the brennenstuhl® Multi Battery 18V System	1173700007
1172640082	4007123685639	Universal magnetic holder MH 1	1173700007



Multi Battery LED Telescopic Work Light 6050 MA

Maximum flexibility. Full compatibility with leading battery technologies.

- Compatible with various 18V rechargeable batteries (different Ah classes) from the 10 power tool manufacturers: Bosch Professional, Dewalt, Fein, Festool, Flex, Hikoki, Makita, Metabo CAS, Milwaukee and Würth.
- brennenstuhl® is part of AMPShare - Powered by Bosch Professional: The AMPShare battery alliance enables the use of Brennenstuhl work lamps with the 18V batteries from Bosch Professional.
- Working spotlights including interface adapters for 5 manufacturers (Bosch Professional, Dewalt, Makita, Metabo CAS, Milwaukee).
- With extendable telescope and tiltable spotlight head.
- Compact and easy to transport - tripod light folds up completely.
- Flexible adjustment thanks to stable stand by means of tripod and height-adjustable telescope (can be extended up to 1.40 m).
- The tiltable and rotatable spotlight head provides perfect area light.
- With battery and switch level display.
- Removable battery protection cover.
- Protection system for Power-Tool batteries: The batteries used are protected against deep discharge and overheating (caused by high load currents).
- With on/off switch, which also controls the 4 switching levels (100% - 75% - 50% - 25% light).
- Includes a practical carrying bag.
- BGI608 K2: Use for rough operation with high mechanical, physical and chemical effects.

brennenstuhl®
MULTI BATTERY
18V-SYSTEM



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173700004
EAN	4007123681389
UP	1
Luminous flux	7700 lm
Power consumption	60 W
Luminous efficacy	128 lm/W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	18 V
Battery voltage	18 V
Min.-max. height adjustable	183 cm
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	black/grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640066	4007123676071	Adapter Milwaukee/Dewalt for LED work light in the brennenstuhl® Multi Battery 18V System	1173700004
1172640064	4007123677979	Makita adapter for LED work light in the brennenstuhl® Multi Battery 18V System	1173700004
1172640063	4007123677948	Adapter Bosch Professional for LED work light in the brennenstuhl® Multi Battery 18V System	1173700004
1172640065	4007123677986	Adapter Metabo CAS for LED work light in the brennenstuhl® Multi Battery 18V System	1173700004



Professional Multi Battery LED Battery Portable Work Light HL 3000

Maximum flexibility. Full compatibility with leading battery technologies.

- Compatible with various 18V batteries (different Ah classes) from the 11 power tool manufacturers: Bosch Professional, Dewalt, Festool, Flex, Makita, Metabo CAS, Milwaukee.
- Work light including interface adapters for 5 manufacturers (Bosch Professional, Dewalt, Makita, Metabo CAS, Milwaukee).
- brennenstuhl® is part of AMPShare - Powered by Bosch Professional: The AMPShare battery alliance enables the use of Brennenstuhl work lamps with the 18V batteries from Bosch Professional.
- 2 in 1 hand lamp and spotlight in one - max. range 200m.
- Super-bright SMD LEDs with 1140lm as a perfect spotlight.
- COB LED light ring with 2160lm suitable for area light.
- Switch with function: 100% spot - 100% area light - 75% - 50% - 25% light.
- Light duration depending on the battery used: Spot 100min per Ah / area light 50min per Ah.
- Battery status display for the remaining energy of the battery used, the batteries are to be charged externally.
- Protection system for Powertool batteries: The batteries used are protected against deep discharge and overheating (caused by high load currents).
- Removable battery protection cover.
- With ergonomic handle and adjustable magnetic base.
- With on/off switch.
- BGI608 K2: Use in harsh environments with high mechanical, physical and chemical stresses.

PROFESSIONAL

brennenstuhl®
MULTI BATTERY
18V-SYSTEM



Powered by **BOSCH**



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173730000
EAN	4007123681396
UP	1
Luminous flux	2160 lm
Power consumption	20 W
Luminous efficacy	108 lm/W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	18 V
Battery voltage	18 V
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	black/grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640066	4007123676071	Adapter Milwaukee/Dewalt for LED work light in the brennenstuhl® Multi Battery 18V System	1173730000
1172640064	4007123677979	Makita adapter for LED work light in the brennenstuhl® Multi Battery 18V System	1173730000
1172640063	4007123677948	Adapter Bosch Professional for LED work light in the brennenstuhl® Multi Battery 18V System	1173730000
1172640065	4007123677986	Adapter Metabo CAS for LED work light in the brennenstuhl® Multi Battery 18V System	1173730000




Adapter for Multi Battery LED Work Light


- Use the 18V battery system of your choice in any brennenstuhl® Multi Battery LED construction spotlight thanks to the interface adapter.
- The adapter can be inserted into the work spotlight at the brennenstuhl® interface in one easy step.
- The handy adapter can be locked in place without screws - maximum flexibility with the Brennenstuhl Multi Battery 18V System.

brennenstuhl®
MULTI BATTERY
18V-SYSTEM

TECHNICAL DATA

				
Product number	1172640063	1172640066	1172640064	1172640065
EAN	4007123677948	4007123676071	4007123677979	4007123677986
UP	1	1	1	1
Colour	black	black	black	black



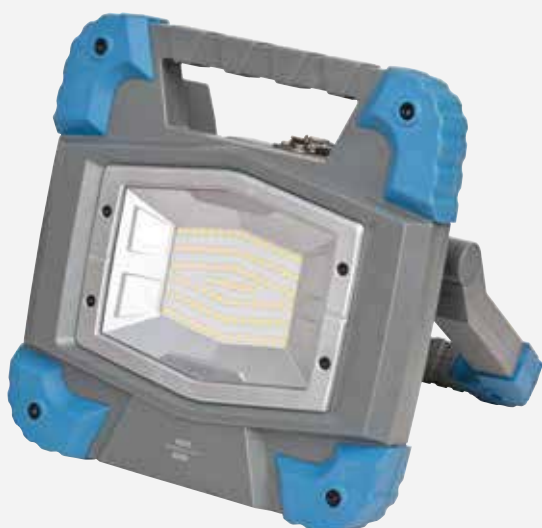

Professional LED Work Light Bosch Professional 18V System BS 5000 MA

Maximum compatibility with batteries from the Bosch Professional 18V system.

- With bright OSRAM LEDs with high efficiency and long service life.
- The AMPShare - Powered by Bosch Professional battery alliance makes it possible for 18V batteries from the Bosch Professional 18V system to be compatible with brennenstuhl® work spotlights.
- Quickly ready for use thanks to exchangeable Bosch Professional 18V battery.
- Compatible with ProCORE18V and GBA 18V Li-Ion batteries from the Bosch Professional range.
- Switching levels for working light with 100% and 50%, dimmable 10% to 100%.
- Light duration approx. 2.5h (100%), 5h (50%), when using a battery 18V 5Ah.
- Robust housing, non-slip due to rubberised corner protection.
- Folding handle for standing or attaching to tripod.
- Any compatible battery is guaranteed to fit through the removable battery protection cover.
- Powerbank function: USB charging port for devices with USB charging cable like smartphones, tablets, etc.
- Category 2 (K2) operating equipment: Use for rough operation with high mechanical, physical and chemical effects.

PROFESSIONAL



Powered by **BOSCH**



ENGINEERED IN GERMANY



TECHNICAL DATA

Product number	1171630501
EAN	4007123674572
UP	1
Luminous flux	6000 lm
Power consumption	50 W
Colour temperature	5000 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	18 V
Battery voltage	18 V
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP55
Colour	grey/blue

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1171630501
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1171630501
1172640082	4007123685639	Universal magnetic holder MH 1	1171630501



360° Rechargeable LED Work Light

For indoors and outdoors use, IP54, IK08.

- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- Switch with light functions 100 - 50 - 25 %.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Integrated lithium-ion battery 11.1 V/4.4 Ah with charging indicator.
- With ON/OFF switch.



TECHNICAL DATA

Product number	1171410301
EAN	4007123671557
UP	1
Luminous flux	3000 lm
Luminous efficacy	100 lm/W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Battery capacity	4.4 Ah
Battery voltage	11.1 V
Light duration max.	12 h
Battery charging time approx.	5 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	black

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1171410301
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1171410301



Rechargeable LED Work Light RUFUS

Highly luminous, versatile and indestructible.

- Always bright working light even in places without power supply.
- Switch with functions
 - Light: 100 % - 75 % - 50 % - 25 % - 10 %.
- Work light can remain on during charging.
- Powerbank function: USB charging port 1 A for devices with USB charging cable such as smartphones, tablets, etc.
- Li-Ion battery 7.4 V/5 Ah with powerbank function and charging indicator.
- Housing made of die-cast aluminium, edge protection made of high-quality plastic.
- Shockproof and drop-proof from up to 3 m height.
- Stable, multi-level fold-out frame.
- With matching robust bag for safe transport.



TECHNICAL DATA

Product number	1173100100	1173110100
EAN	4007123668434	4007123668441
UP	1	1
Luminous flux	1500 lm	3000 lm
Power consumption	15 W	30 W
Colour temperature	6500 K	6500 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)
Battery capacity	5 Ah	5 Ah
Battery voltage	3.7 V	7.4 V
Light duration max.	25 h	25 h
Battery charging time approx.	3 h	5 h
Number of batteries	1	1
Battery type	Built-in battery pack	Built-in battery pack
Battery technology	Lithium-ion	Lithium-ion
Impact strength	IK08	IK08
Protection class	III	III
Degree of protection (IP)	IP65	IP65
Colour	black	black

1500
LUMEN

3000
LUMEN

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640002	4007123653201	Magnetic holder for Rechargeable LED Spot	1173100100, 1173110100



LED battery spotlight CL

with clamping device

The work spotlights with clamping device can be attached anywhere and optimally aligned for the work application thanks to the ball joint.

- Ideally suited for assembly work, in cellars and on workbenches.
- Work spotlight with special clamping device for easy mounting by clamping to work surfaces, pipes, panels, etc.
- Lightweight and robust plastic housing with strong, sturdy clip.
- Easy alignment of the working light thanks to ball bearing, the angle of inclination of the working light is flexibly adjustable.
- With ball joint for individual alignment in all directions by almost 360 degrees.
- Integrated USB power bank for charging smartphones etc.
- Category 2 (K2) equipment: For use in harsh environments with high mechanical, physical and chemical impact.



**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173070010	1173070020
EAN	4007123674442	4007123674459
UP	1	1
Luminous flux	950 lm	3800 lm
Power consumption	10 W	40 W
Colour temperature	6350 K	6400 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)
Nominal input voltage	5 V	5 V
Lifetime	51000 h	54000 h
Battery capacity	2.5 Ah	5 Ah
Battery voltage	3.7 V	7.4 V
Light duration max.	12 h	12 h
Battery charging time approx.	3 h	5 h
Number of batteries	1	1
Battery type	Built-in battery pack	Built-in battery pack
Battery technology	Lithium-ion	Lithium-ion
Impact strength	IK08	IK08
Protection class	III	III
Degree of protection (IP)	IP65	IP65
Colour	black	black

**950
LUMEN**

**3800
LUMEN**



Rechargeable LED Work Light EL 2000 MA

For indoor and outdoor use, IP 54.

- Solid, modern aluminium housing.
- Space-saving due to foldable frame.
- Switch with dimmer function 100% / 50%.
- Sturdy tubular steel frame with plastic protective corners and ergonomically shaped plastic carrying handle.
- Spotlight can be steplessly swivelled and locked.
- Suitable for mounting on brennenstuhl® tripods.
- With integrated Li-Ion battery 3,7 V / 6,6 Ah and battery status display on the back and additional low-battery warning.
- Includes powerbank function and 1x USB charging cable.



TECHNICAL DATA

Product number	1171960205
EAN	4007123675685
UP	1
Luminous flux	2150 lm
Colour temperature	6000 K
Colour rendering index	80-89 (class 1B)
Lifetime	36000 h
Battery capacity	6.6 Ah
Battery voltage	3.7 V
Light duration max.	6 h
Battery charging time approx.	4 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	black/grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1171960205
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1171960205
1172640082	4007123685639	Universal magnetic holder MH 1	1171960205



Rechargeable LED worklight SH 1000 MAC

LED work spotlight ideal for a wide range of applications in the home, garden or camping.

- Design in a handy and compact pocket format.
- Multifunctional holding system with carabiner ring and magnet for flexible positioning.
- Lightweight and robust plastic housing.
- With on/off switch and 3 different brightness levels (25%/50%/100%) and flash function.
- Integrated Li-Ion battery 3.7 V/2.2 Ah with charge indicator
- Charging via 1m USB C to USB C charging cable (start-up is not possible during charging).



TECHNICAL DATA

Product number	1173700009
EAN	4007123691975
UP	1
Luminous flux	1000 lm
Power consumption	10 W
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	5 V
Lifetime	33000 h
Battery capacity	2.2 Ah
Battery voltage	3.7 V
Light duration max.	6 h
Battery charging time approx.	3 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP54
Colour	black/grey





Construction Telescopic Tripod ST 200

- Automatic lowering mechanism for stepless height adjustment from 1.08m to 2m.
- Flexible mounting options: T-bar for a single spotlight, crossbar for two spotlights.
- Controlled lowering for additional safety.
- Maximum load capacity of 30kg.
- 3 fold-out uprights for a robust construction.
- Cable holder for better organisation.
- Fold-out, extremely stable feet with rubber protection.
- Accessories included: T-bar, wing bolt M8x20, 2x M6x45 bolt, 2x M6 nut, 4x M6 washer.
- Additional accessories for crossbar: 4x M6x55 bolt, 4x M6 nut, 8x M6 washer.

TECHNICAL DATA

Product number	1170310030
EAN	4007123691753
UP	1
Min.-max. height adjustable	108 cm - 200 cm
Max. load capacity	30 kg
Colour	black



Bau Telescopic Tripod ST 301

- Sturdy tubular steel, plastic-coated.
- Suitable for commercial use as well as for the demanding do-it-yourselfer.
- Three extra-long, sturdy standpipes, each 95 cm for safe standing.
- Height adjustable from 115 cm up to 300 cm, maximum load 10kg.

TECHNICAL DATA


Product number	1170310010
EAN	4007123674527
UP	1
Min.-max. height adjustable	115 cm - 300 cm
Max. load capacity	10 kg
Colour	black



Crossbar CB 70 for brennenstuhl® tripods


To hold two construction lamps.

- Can be mounted on all brennenstuhl® tripods.
- Allows for the assembly of 2 brennenstuhl® lamps up to a maximum width of 38 cm each.
- Stable and robust design.
- Durable 4-sided steel profile, galvanized.
- Including mounting screws.

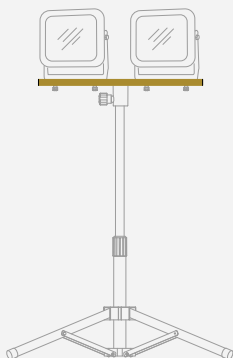

TECHNICAL DATA

Product number	1172640059
EAN	4007123663736
UP	1



Wall Lights



LED Light JAR0

with infrared motion detector

For indoor and outdoor installation, IP 65.

- LED spotlight with super-bright Everlight SMD LEDs.
- Ideal for automatic illumination of entrance areas, driveways or carports as well as a deterrent against burglary and theft.
- Infrared motion detector can be continuously swivelled horizontally and vertically.
- Detection range up to 10 metres, detection angle approx. 180°.
- Switch-on time adjustable from approx. 10 seconds to approx. 5 minutes.
- With adjustable twilight sensor.
- User-friendly installation due to external, waterproof spring-loaded clamp.
- Front pane made of safety glass.
- Solid, modern aluminium housing.
- Adjustable mounting bracket.



TECHNICAL DATA

Product number	1171250142	1171250242	1171250342	1171250542
EAN	4007123684953	4007123684960	4007123684977	4007123684984
UP	1	1	1	1
Luminous flux	1150 lm	2300 lm	3450 lm	5800 lm
Power consumption	10 W	20 W	30 W	50 W
Luminous efficacy	138 lm/W	140 lm/W	136 lm/W	144 lm/W
Energy efficiency class	A	A	A	A
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 240 V	220 V - 240 V	220 V - 240 V	220 V - 240 V
With motion detector	✓	✓	✓	✓
Max. detection range	10 m	10 m	10 m	10 m
Max. angle of coverage	180 °	180 °	180 °	180 °
Min.-max. duty cycle	10 s - 5 min	10 s - 5 min	10 s - 5 min	10 s - 5 min
Impact strength	IK08	IK08	IK08	IK08
Protection class	I	I	I	I
Degree of protection (IP)	IP65	IP65	IP65	IP65
Basic colour	black	black	black	black

1150
LUMEN

2300
LUMEN

3450
LUMEN

5800
LUMEN



LED Light JARO

For indoor and outdoor mounting, IP 65.

- LED spotlight with super-bright Everlight SMD LEDs and flat design.
- User-friendly mounting due to external, waterproof spring-loaded clamp.
- Front cover made of safety glass.
- Solid, modern aluminium housing.
- Adjustable mounting bracket.



TECHNICAL DATA

Product number	1171250141	1171250241	1171250341
EAN	4007123684854	4007123684861	4007123684878
UP	1	1	1
Luminous flux	1150 lm	2300 lm	3450 lm
Power consumption	10 W	20 W	30 W
Luminous efficacy	138 lm/W	140 lm/W	136 lm/W
Energy efficiency class			
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 240 V	220 V - 240 V	220 V - 240 V
Impact strength	IK08	IK08	IK08
Protection class	I	I	I
Degree of protection (IP)	IP65	IP65	IP65
Basic colour	black	black	black

**1150
LUMEN**

**2300
LUMEN**

**3450
LUMEN**



TECHNICAL DATA

Product number	1171250541	1171250041	1171250741
EAN	4007123684885	4007123684892	4007123684908
UP	1	1	1
Luminous flux	5800 lm	11500 lm	17500 lm
Power consumption	50 W	100 W	150 W
Luminous efficacy	144 lm/W	142 lm/W	137 lm/W
Energy efficiency class			
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 240 V	220 V - 240 V	220 V - 240 V
Impact strength	IK08	IK08	IK08
Protection class	I	I	I
Degree of protection (IP)	IP65	IP65	IP65
Basic colour	black	black	black

**5800
LUMEN**

**11500
LUMEN**

**17500
LUMEN**



brennenstuhl® Connect LED WiFi Duo Spotlight WFD 3050

For outdoor use, IP 54.

- LED spotlight with super-bright Everlight SMD LEDs.
- Ideal for automatic illumination of entrance areas, driveways or carports as well as a deterrent against burglary and theft.
- Easy commissioning and control with free brennenstuhl® Connect app and integrated WiFi module.
- Control of various light functions via brennenstuhl® Connect App:
 - Stepless adjustment of light intensity.
 - Stepless adjustment of the light temperature from cold white to warm white.
 - Timer and countdown.
 - Event records.
 - Programmed afterglow.
- Voice control via Amazon Alexa or Google Assistant.
- Spotlight head can be swivelled horizontally and vertically.
- Detection range up to 12m, with 120° angle of detection.
- Day/night sensor sensitivity and light duration 5sec to 60min.



TECHNICAL DATA

Product number	1179060010
EAN	4007123674718
UP	1
Luminous flux	3500 lm
Power consumption	29.2 W
Luminous efficacy	121 lm/W
Energy efficiency class	A+ E
Min.-max. colour temperature	3000 K - 6500 K
Colour rendering index	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 250 V
Lifetime	46000 h
With motion detector	✓
Max. detection range	12 m
Max. angle of coverage	120°
Min.-max. duty cycle	5 s - 60 min
Impact strength	IK06
Protection class	I
Degree of protection (IP)	IP54
Basic colour	black/grey



brennenstuhl®Connect LED WiFi Spotlight WF 2050

For outdoor use, IP 54.

- LED spotlight with super-bright Everlight SMD LEDs.
- Ideal for automatic illumination of entrance areas, driveways or carports as well as a deterrent against burglary and theft.
- Easy commissioning and control with free brennenstuhl®Connect app and integrated WiFi module.
- Control of various light functions via brennenstuhl®Connect App:
 - Stepless adjustment of light intensity.
 - Stepless adjustment of the light temperature from cold white to warm white.
 - Timer and countdown.
 - Event records.
 - Programmed afterglow.
- Voice control via Amazon Alexa or Google Assistant.
- Spotlight head can be swivelled horizontally and vertically.
- Detection range up to 12m, with 120° angle of detection.
- Day/night sensor sensitivity and light duration 5sec to 60min.



TECHNICAL DATA

Product number	1179050010
EAN	4007123674695
UP	1
Luminous flux	2400 lm
Power consumption	19.5 W
Luminous efficacy	120 lm/W
Energy efficiency class	A E
Min.-max. colour temperature	3000 K - 6500 K
Colour rendering index	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 250 V
Lifetime	46000 h
With motion detector	✓
Max. detection range	12 m
Max. angle of coverage	120 °
Min.-max. duty cycle	5 s - 60 min
Impact strength	IK06
Protection class	I
Degree of protection (IP)	IP54
Basic colour	black/grey



LED spotlights AL

with infrared motion detector

For installation indoors and outdoors, IP 44.

- LED Light with extra bright OSRAM SMD LEDs.
- Ideal for automatic illumination of entry areas, driveways, carports and for deterring break-in and theft.
- Warmth, ambient light colour.
- PIR sensor horizontally and vertically pivoting.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- User-friendly assembly thanks to external, water-tight connection terminal.
- Solid and modern aluminium casing.
- Adjustable mounting bracket for mounting.



TECHNICAL DATA

	1178010901	1178020901	1178030901
Product number	1178010901	1178020901	1178030901
EAN	4007123675715	4007123675739	4007123675753
UP	1	1	1
Luminous flux	1010 lm	2080 lm	3110 lm
Power consumption	10 W	20 W	30 W
Luminous efficacy	101 lm/W	104 lm/W	104 lm/W
Energy efficiency class			
Colour temperature	3000 K	3000 K	3000 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)
Nominal input voltage	230 V	230 V	230 V
Min.-Max. Nominal input voltage	220 V - 240 V	220 V - 240 V	220 V - 240 V
Lifetime	54000 h	54000 h	54000 h
With motion detector	✓	✓	✓
Max. detection range	12 m	12 m	12 m
Max. angle of coverage	180°	180°	180°
Min.-max. duty cycle	10 s - 4 min	10 s - 4 min	4 s - 4 min
Impact strength	IK07	IK07	IK07
Protection class	I	I	I
Degree of protection (IP)	IP44	IP44	IP44
Basic colour	grey	grey	grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1178010901, 1178020901, 1178030901
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1178010901, 1178020901, 1178030901



LED spotlights AL

For installation indoors and outdoors, IP 44.

- LED Light with extra bright OSRAM SMD LEDs.
- Warmth, ambient light colour.
- User-friendly assembly thanks to external, water-tight connection terminal.
- Solid and modern aluminium casing.
- Adjustable mounting bracket for mounting.



TECHNICAL DATA

Product number	1178010900	1178020900	1178030900
EAN	4007123675708	4007123675722	4007123675746
UP	1	1	1
Luminous flux	1010 lm	2080 lm	3110 lm
Power consumption	10 W	20 W	30 W
Luminous efficacy	101 lm/W	104 lm/W	104 lm/W
Energy efficiency class			
Colour temperature	3000 K	3000 K	3000 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)	80-89 (class 1B)
Min.-Max. Nominal input voltage	220 V - 240 V	220 V - 240 V	220 V - 240 V
Lifetime	54000 h	54000 h	54000 h
Impact strength	IK07	IK07	IK07
Protection class	I	I	I
Degree of protection (IP)	IP44	IP44	IP44
Basic colour	grey	grey	grey

**1010
LUMEN**

**2080
LUMEN**

**3110
LUMEN**

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1172640059	4007123663736	Crossbar CB 70 for brennenstuhl® tripods	1178010900, 1178020900, 1178030900
1170310010	4007123674527	Bau Telescopic Tripod ST 301 black with crossbar	1178010900, 1178020900, 1178030900



LED Oval Lamp 0L

Ideal for the garage, cellar, workshop and outdoors.

- Compact LED oval light made of plastic with translucent cover.
- Ideal for automatically illuminating entrance areas, driveways or carports as well as deterring burglary and theft.
- Ceiling and wall mounting possible.
- User-friendly installation thanks to external waterproof connection terminal.
- Extremely long service life of the LEDs, impact-resistant, maintenance-free.

Additional for model with infrared motion detector:

- Detection range up to 8 metres, detection angle approx. 100°.
- Switch-on time adjustable up to 60 seconds.

1680
LUMEN



TECHNICAL DATA

Product number	1270780900	1270780901
EAN	4007123678204	4007123674275
UP	1	1
Luminous flux	1680 lm	1680 lm
Power consumption	15 W	15 W
Luminous efficacy	108 lm/W	108 lm/W
Energy efficiency class		
Colour temperature	4000 K	4000 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)
Nominal input voltage	230 V	230 V
Min.-Max. Nominal input voltage	220 V - 250 V	220 V - 250 V
Lifetime	36000 h	36000 h
With motion detector	–	✓
Max. detection range		8 m
Max. angle of coverage		100 °
Min.-max. duty cycle		10 s - 1 min
Impact strength	IK06	IK06
Protection class	II	II
Degree of protection (IP)	IP65	IP54
Basic colour	white	white



**Battery LED Light LUF0S****with infrared motion detector**

For installation indoors and outdoors.

- LED lights can be used flexibly – without cable – due to battery operation.
- Universal use indoors and outdoors, e.g. for stairs indoors and outdoors, garages, carports or sheds.
- With super bright LEDs.
- PIR sensor with max 180° angle of reach (horizontal) and max. of 10 m of surrounding.
- Switch-on duration can be set up to 30 seconds.
- Service life with one set of batteries about 800 days with 6 switch-ons daily.
- Light head can be tilted and swivelled.
- Easy to install.



TECHNICAL DATA

Product number	1178900100	1178900200
EAN	4007123671533	4007123671540
UP	1	1
Luminous flux	440 lm	480 lm
Colour temperature	5000 K	5000 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)
Light duration max.	26 h	26 h
Number of batteries	3	3
Battery type	Baby C LR14	Baby C LR14
Battery technology	Alkaline	Alkaline
With motion detector	✓	✓
Max. detection range	10 m	10 m
Max. angle of coverage	180 °	180 °
Min.-max. duty cycle	10 s - 0,5 min	10 s - 0,5 min
Protection class	III	III
Degree of protection (IP)	IP44	IP44
Basic colour	grey	grey

440
LUMEN

240
LUMEN



Solar LED Wall Light SOL 1000 Cubus with infrared motion detector

Stylish outdoor lighting for carports, facades and gardens.

- Solar panel on the top for optimum solar radiation.
- High-quality brand LEDs and frosted glass for even light distribution.
- Monocrystalline solar cells for high energy efficiency.
- Li-Ion battery 18650 3.7V/2Ah with integrated overcharge and deep discharge protection.
- 4 different light modes for flexible lighting options:
 - M1: Motion detection for 30 seconds with 1000lm
 - M2: Permanent with 100lm from darkness, on movement for 30 seconds with 1000lm
 - M3: Permanent with 100lm from darkness
 - M4: Permanent with 250lm from darkness.
- Infrared motion sensor with 120° horizontal detection angle and a range of up to 5m.
- Integrated twilight sensor for automatic switching on and off.
- Includes screw set, mounting plate and security bracket as theft protection.



TECHNICAL DATA

Product number	1173740001
EAN	4007123691692
UP	1
Luminous flux	1000 lm
Power consumption	6.9 W
Colour temperature	4000 K
Battery capacity	2 Ah
Battery voltage	3.7 V
Light duration max.	36 h
Battery charging time approx.	7 h
Battery type	18650
Battery technology	Lithium-ion
With motion detector	✓
Max. detection range	5 m
Max. angle of coverage	120 °
Impact strength	IK05
Protection class	III
Degree of protection (IP)	IP54
Basic colour	grey





Solar LED Wall Light SOL 1000 Plana with infrared motion detector

Stylish outdoor lighting for carports, facades and gardens.

- Solar panel on the front for optimum solar radiation.
- Monocrystalline solar cells for high energy efficiency.
- Li-Ion battery 18650 3.7V/2Ah with integrated overcharge and deep discharge protection.
- 4 different light modes for flexible lighting options:
 - M1: Motion detection for 30 seconds with 1000lm,
 - M2: Permanent with 100lm from darkness, on movement for 30 seconds with 1000lm,
 - M3: Permanent with 100lm from darkness,
 - M4: Permanent with 250lm from darkness.
- Infrared motion sensor with 120° horizontal detection angle and a range of up to 5m.
- Integrated twilight sensor for automatic switching on and off.
- Includes screw set, mounting plate and security bracket as theft protection.



TECHNICAL DATA

Product number	1173740002
EAN	4007123691708
UP	1
Luminous flux	1000 lm
Power consumption	6.9 W
Colour temperature	4000 K
Battery capacity	2 Ah
Battery voltage	3.7 V
Light duration max.	36 h
Battery charging time approx.	7 h
Battery type	18650
Battery technology	Lithium-ion
With motion detector	✓
Max. detection range	5 m
Max. angle of coverage	120 °
Impact strength	IK05
Protection class	III
Degree of protection (IP)	IP54
Basic colour	grey





Solar LED Wall Light SOL 1000 Pad with infrared motion detector

Stylish outdoor lighting for carports, facades and gardens.

- The solar panel of the spotlight can be set up flexibly, either on the top of the spotlight itself or externally via a 3 metre long cable to the sunny side.
- Thanks to the integrated feet, it can also be used standing up.
- With 2x Li-Ion battery 18650 3.7V/2Ah with integrated overcharge and deep discharge protection.
- 4 different light modes for flexible lighting options:
 - M1: On movement, the spotlight activates for 30 seconds with a brightness of 1000lm.
 - M2: On movement, the spotlight activates for 30 seconds at 1000lm, then lights up for a further 30 seconds at 250lm and then switches off.
 - M3: When movement is detected, the spotlight is activated for 60 seconds at 1000lm, then lights up for a further 30 seconds at 250lm and then switches off.
 - M4: Continuous light for approx. 2 hours with a brightness of 1000lm.
- Infrared motion sensor with 120° horizontal detection angle and a range of up to 5m.
- Integrated twilight sensor for automatic switching on and off.
- Includes screw set and 3m cable.



TECHNICAL DATA

Product number	1173740003
EAN	4007123691715
UP	1
Luminous flux	1000 lm
Power consumption	7 W
Colour temperature	4000 K
Cable length	3 m
Battery capacity	4 Ah
Battery voltage	3.7 V
Light duration max.	36 h
Battery charging time approx.	9.3 h
Battery type	18650
Battery technology	Lithium-ion
With motion detector	✓
Max. detection range	5 m
Max. angle of coverage	120 °
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP65
Basic colour	grey





Workshop • Hand Lamps



Professional Rechargeable LED Inspection Light HL 1000 ACW

Ideal for illuminating confined and difficult to access areas.

- LED work lamp with COB LED and a flexibly bendable SMD LED light source.
- With 360° diffuser for wide-area illumination.
- Four switching levels (SMD LED - COB LED: 100%-50%-25%) .
- Rubberised surface for optimum grip.
- With integrated magnet on the back and 360° swivelling hook for flexible use.
- Replaceable standard 18650 Li-Ion battery 3.7V/2.5Ah with charging indicator.
- Charging via wireless charging pad (item no. 1173780001 - sold separately) or via the integrated USB C port.
- USB C charging cable included.

PROFESSIONAL



TECHNICAL DATA

Product number	1173730001
EAN	4007123691906
UP	1
Luminous flux	1000 lm
Battery capacity	2.5 Ah
Battery voltage	3.7 V
Light duration max.	12 h
Battery charging time approx.	3 h
Battery type	18650
Battery technology	Lithium-ion
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	black/grey

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1173780001	4007123691920	Professional Wireless Charging Pad WCP, 10W	1173730001





Professional Rechargeable LED Torch TL 1000 ACW

Ideal for illuminating different environments.

- LED work lamp with SMD LED.
- Stepless focus from wide-area close-up light to focussed high beam.
- Lamp head can be folded through 180°.
- With three different switching levels (100%-50%-25%).
- Additional magnet on the back and base for flexible use.
- Rubberised surface for optimum grip.
- Replaceable standard 18650 Li-Ion battery 3.7V/2.5Ah with charging indicator.
- Charging via wireless charging pad (item no. 1173780001 - sold separately) or via the integrated USB C port.
- USB C charging cable included.

PROFESSIONAL



TECHNICAL DATA

Product number	1173750007
EAN	4007123691913
UP	1
Luminous flux	1000 lm
Battery capacity	2.5 Ah
Battery voltage	3.7 V
Light duration max.	12 h
Battery charging time approx.	3.5 h
Battery type	18650
Battery technology	Lithium-ion
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	grey/black

ACCESSORIES

Art.no.	EAN	Description	to art.no.
1173780001	4007123691920	Professional Wireless Charging Pad WCP, 10W	1173750007





Professional Wireless Charging Pad WCP

The wireless charging pad enables convenient wireless charging of wireless charging-capable devices.

- Charging station with integrated holder for secure placement of mobile devices during the charging process.
- Compatible with USB C charging power supply 20W Power Delivery (article number 1172640083), enables charging power of up to 10W (power supply not included).
- Wireless charging pad with suspension device for easy mounting.
- Equipped with two magnets on the back for secure attachment and stable hold.
- Wireless charger with LED indicator for status display during charging.
- Incl. 1m USB C cable.

PROFESSIONAL

TECHNICAL DATA

Product number	1173780001
EAN	4007123691920
UP	1
Impact strength	IK08
Colour	black/grey





Rechargeable LED Hand Lamp HL 1000 A

Maximum light output for highest demands.

- With super-bright COB LED at the front.
- Additional switching level for 1 SMD LED in the luminaire head.
- Stepless dimming function 10 % to 100 % for particularly long light duration.
- Rubber coating for increased shock resistance and best grip.
- Bendable base up to +/- 60° with integrated magnet.
- 2 magnets at the back and fold-out hook for flexible use.
- Integrated Li-Ion battery 3.7 V/4.4 Ah with charge indicator.
- USB C charging interface, including USB charging cable.



TECHNICAL DATA

Product number	1175680
EAN	4007123663422
UP	1
Luminous flux	1000 lm
Total luminous flux secondary source	200 lm
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Battery capacity	4.4 Ah
Battery voltage	3.7 V
Light duration max.	24 h
Battery charging time approx.	3.5 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK08
Protection class	III
Degree of protection (IP)	IP54
Colour	anthracite/black



Rechargeable LED Hand Lamp HL 701 A

Bright, handy and compact.

- 12 super-bright SMD LEDs at the front.
- Additional switching stage for 1 SMD LED in the luminaire head.
- Stepless dimming function 10 % to 100 % for particularly long light duration.
- Rubberised handle for optimum grip.
- Foldable holding foot up to $\pm 90^\circ$ with integrated magnet.
- 2 magnets at the back and fold-out hook for flexible use.
- Li-Ion battery 3.7V/2.0Ah with charge indicator
- USB C charging interface, including USB C charging cable



TECHNICAL DATA

Product number	1175640010
EAN	4007123691241
UP	1
Luminous flux	700 lm
Total luminous flux secondary source	100 lm
Colour temperature	5700 K
Colour rendering index	80-89 (class 1B)
Battery capacity	2 Ah
Battery voltage	3.7 V
Light duration max.	10 h
Battery charging time approx.	3.5 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP54
Colour	black



LED Rechargeable Hand Lamp HL 501 A

The best quality with excellent lighting capacity.

- 6 super-bright SMD LEDs at the front with up to 3 hours of illumination when the battery is fully charged.
- Additional switching level for 1 SMD LED in the light head.
- Functions: Spot - 100 % - 50 %.
- Rubberised surface for optimum grip.
- Bendable holding foot up to 200° with integrated magnet.
- 2 magnets on the back and two 360° swivelling hooks for flexible use.
- Integrated Li-Ion battery 3.7 V/2.5 Ah with charge indicator.
- On/off push button.
- USB C charging interface including 60cm USB A to USB C charging cable.



TECHNICAL DATA

Product number	1175670110
EAN	4007123691890
UP	1
Luminous flux	500 lm
Total luminous flux secondary source	120 lm
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Battery capacity	2.5 Ah
Battery voltage	3.7 V
Light duration max.	10 h
Battery charging time approx.	4 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP20
Colour	black/grey



LED Workshop Rechargeable Light WL 500 A

Flexible use with excellent light and ON/OFF switch. Dust protected and splash-proof, IP 54.

- Ideally suited in the workshop and for hobby applications.
- 12 super-bright Seoul SMD LEDs.
- Workshop light can stay on during charging.
- Functions: 100 % - 40 % - 10 % for long lighting time.
- On/Off push button.
- With ergonomic rubber handle.
- Stable, extendable and rotatable hook and magnet in the base.
- Impact and break resistant protective shell.
- Integrated Li-Ion battery 3.7 V/2.2 Ah with charge indicator.
- USB charging cable included.



TECHNICAL DATA

Product number	1175580
EAN	4007123667888
UP	1
Luminous flux	520 lm
Colour temperature	6500 K
Battery capacity	2.2 Ah
Battery voltage	3.7 V
Light duration max.	24 h
Battery charging time approx.	5 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP54
Colour	black/yellow



Rechargeable LED hand lamp HL 400 AC

The LED work light is extremely slim and practical - ideal for illuminating the tightest of spaces.

- With 3 individually switchable light sources: Main light: 400lm, spot: 120lm and light source on the back: 200lm.
- Switch with 4 functions: Spot light, main light, rear light and the option to activate the main and rear light simultaneously.
- Folding lamp head.
- Integrated Li-ion battery 3.7V/0.8Ah with charge indicator.
- 3 magnets (2x on the side and 1x in the base) and 1 hook for flexible use.
- With carrying strap and clip.
- Incl. 60cm USB A to USB C charging cable.



TECHNICAL DATA

Product number	1173730002
EAN	4007123691937
UP	1
Luminous flux	400 lm
Power consumption	3 W
Battery capacity	0.8 Ah
Battery voltage	3.7 V
Light duration max.	6 h
Battery charging time approx.	2.5 h
Battery type	Special battery
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP20
Colour	black/grey





Rechargeable LED Hand Lamp SANSA 401 A

Extremely slim lamp for tight spaces.

- 12 super-bright SMD LEDs at the front.
- Additional switching stage for 1 SMD LED in the luminaire head.
- Stepless dimming function 0 to 100 % for particularly long light duration.
- Charging time approx. 3 hours.
- Rubberised surface for optimum grip.
- Foldable and rotatable lamp head, can be folded to pocket size.
- 2 magnets at the back, one in the base and fold-out hook for flexible use.
- Li-Ion 3.7 V/2.0 Ah battery and charge indicator.
- USB C charging interface, including USB C charging cable.



TECHNICAL DATA

Product number	1177370010
EAN	4007123691258
UP	1
Luminous flux	400 lm
Total luminous flux secondary source	70 lm
Power consumption	3.3 W
Colour temperature	6000 K
Colour rendering index	80-89 (class 1B)
Lifetime	25000 h
Battery capacity	2 Ah
Battery voltage	3.7 V
Light duration max.	80 h
Battery charging time approx.	3 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP20
Colour	black/grey



8 + 1 SMD LED-Universal Lamp HL DB 81 M1H1

Compact, practical for a variety of uses.

- 8 super bright SMD LEDs with special lens optics.
- More than 4 hours of light when fully charged.
- Additional switching step for 1 SMD LED in the lamp head.
- Plastic bracket with integrated magnet can be folded 200°.
- 360° hanging hook and magnet facility.
- With ON/OFF switch.



TECHNICAL DATA

Product number	1175410010
EAN	4007123641611
UP	1
Luminous flux	250 lm
Total luminous flux secondary source	100 lm
Colour temperature	6500 K
Battery voltage	1.5 V
Light duration max.	10 h
Number of batteries	3
Battery type	Mignon AA LR6
Battery technology	Alkaline
Colour	black/yellow





LED rechargeable hand lamp HL 201 A

Handy, compact and reliable.

- 4 super-bright SMD LEDs with up to 3 hours of light duration.
- Additional switching stage for 1 SMD LED in the light head.
- Bendable mounting base up to +/- 90° with integrated magnet.
- 360° rotatable, retractable hook.
- On/off push button.
- Li-Ion battery 3.7V/1000mAh with charge indicator.
- USB C charging cable included.



TECHNICAL DATA

Product number	1175430020
EAN	4007123691234
UP	1
Luminous flux	250 lm
Total luminous flux secondary source	70 lm
Colour temperature	5700 K
Battery capacity	1 Ah
Battery voltage	3.7 V
Light duration max.	6 h
Battery charging time approx.	2 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Impact strength	IK07
Protection class	III
Degree of protection (IP)	IP20
Colour	black



Rechargeable hand-held LED light HL 300 AD

with dynamo quick-charging possibility

- Light, anytime, even without a charged battery
- Charging of the rechargeable battery possible with USB and at any time by means of the integrated dynamo.
- 6 super bright SMD LEDs with up to 9 hours of light.
- Energy-saving mode: Light power can be reduced to 30 %.
- Lighting duration approx. 5 min. per 50 rotations.
- Rubber-clad housing.
- 360° adjustable hook and magnet.
- Integrated Li-Ion battery 3.7 V/1.8 Ah with charging indicator.
- USB charging cable included.



TECHNICAL DATA

Product number	1178590100
EAN	4007123664375
UP	1
Luminous flux	300 lm
Colour temperature	6500 K
Colour rendering index	80-89 (class 1B)
Battery capacity	1.8 Ah
Battery voltage	3.7 V
Light duration max.	9 h
Battery charging time approx.	4 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Protection class	III
Degree of protection (IP)	IP20
Colour	black



4 LED Rechargeable Hand Lamp HL DA 40 MH

Small, handy with excellent light output.

- 4 super-bright SMD-LEDs on the front with up to 3 hours of lighting when fully charged.
- ON/OFF switch 100/50 %.
- Rubber-clad housing.
- Base foot with integrated magnet can be folded up to 180°.
- Belt clip and 360° rotatable hook for flexible use.
- USB charging cable included.
- Integrated Li-Ion Akku 3.7 V/1.8 Ah.



TECHNICAL DATA

Product number	1176440	Battery charging time approx.	3 h
EAN	4007123648238	Number of batteries	1
UP	1	Battery type	Built-in battery pack
Luminous flux	200 lm	Battery technology	Lithium polymer
Colour temperature	6500 K	Protection class	III
Battery capacity	1.8 Ah	Degree of protection (IP)	IP20
Battery voltage	3.7 V	Colour	black/yellow
Light duration max.	3 h		



4 + 3 SMD LED-Universal Lamp HL DB43 MH

Bright light in pocket size, for multi-purpose.

- 4 super-bright SMD LEDs on the front with more than 6 hours of lighting if the batteries are full.
- Additional switching step for 3 LEDs in the lamp head.
- Plastic handle with integrated magnet, 360° bendable.
- 360° swivelled, retractable hanging hook.
- With ON/OFF switch.



TECHNICAL DATA

Product number	1175420010	Light duration max.	24 h
EAN	4007123641628	Number of batteries	3
UP	1	Battery type	Micro AAA LR03
Luminous flux	200 lm	Battery technology	Alkaline
Total luminous flux secondary source	20 lm	Protection class	III
Colour temperature	6500 K	Degree of protection (IP)	IP20
Battery voltage	1.5 V	Colour	black/yellow



LED battery hand lamp PL 200 AC

Best performance in the smallest format.

- Super-bright COB LED with up to 12 hours of light.
- Extensive functions: 100 % - 40 % - 10 % - red - flashing red.
- With practical clip and magnet in the base.
- Integrated Li-Pol battery 3.7 V/450 mAh with charging indicator.
- Includes USB-C charging cable.



TECHNICAL DATA

Product number	1175590100	Battery charging time approx.	2 h
EAN	4007123690459	Number of batteries	1
UP	1	Battery type	Built-in battery pack
Luminous flux	200 lm	Battery technology	Lithium polymer
Colour temperature	6500 K	Protection class	III
Battery capacity	0.45 Ah	Degree of protection (IP)	IP20
Battery voltage	3.7 V	Colour	black
Light duration max.	12 h		



LED Clip-On Lamp HL 100

Easy to use, compact, optimal illumination from a small lamp.

- 5 powerful SMD-LEDs with up to 8 hours of light ON time.
- Additional setting provides another LED in the lamp head.
- Clip with integrated magnet.
- With ON/OFF switch.
- 10 pcs. delivered in an attractive sales box.



TECHNICAL DATA

Product number	1175990010	Number of batteries	3
EAN	4007123663309	Battery type	Micro AAA LR03
UP	10	Battery technology	Alkaline
Luminous flux	107 lm	Impact strength	none
Total luminous flux secondary source	10 lm	Protection class	III
Colour temperature	6500 K	Degree of protection (IP)	IP20
Colour rendering index	80-89 (class 1B)	Colour	yellow/black
Light duration max.	20 h		



Rubber Hand Lamp GH 20


For indoor use.

- Robust, handy work light with handle made of quality hard rubber for conversion, renovation or moving.
- With hook for easy hanging.
- Protective basket with hinged lid.
- With protective glass.
- With 5m RN cable for flexible working.
- Supplied without bulb.
- With E27 socket.



TECHNICAL DATA

Product number	1176460010
EAN	4007123674374
UP	1
Min.-Max. Nominal input voltage	220 V - 240 V
Fittings	E27
Protection class	II
Degree of protection (IP)	IP20
Colour	black



Outdoor Lighting



LED Rechargeable Camping Lamp CAL 1

A camping lantern with a robust hemp rope and bamboo base is the ideal sustainable light source for a range of outdoor activities.

- Natural design and sustainable thanks to the hemp rope and bamboo base.
- With a practical power bank function for charging smartphones and much more.
- Rechargeable via the included USB C charging cable.
- Replaceable batteries (2 x 18650), battery capacity: 3.7V with 5200mAh.
- To switch on/off, press and hold the rotary switch.
- Infinitely dimmable by simply turning the rotary switch.
- With adjustable light colour from 2700K-6500K, by briefly pressing the rotary switch.



- PLASTIC FREE PACKAGING
- USE OF NATURAL MATERIALS



TECHNICAL DATA

Product number	1171800010	1171800
EAN	4007123694112	4007123681228
UP	1	1
Luminous flux	350 lm	350 lm
Power consumption	6 W	6 W
Min.-max. colour temperature	2700 K - 6500 K	2700 K - 6500 K
Colour rendering index	80-89 (class 1B)	80-89 (class 1B)
Battery capacity	5.2 Ah	5.2 Ah
Battery voltage	3.7 V	3.7 V
Light duration max.	75 h	75 h
Battery charging time approx.	5 h	7 h
Number of batteries	2	2
Battery type	18650	18650
Battery technology	Lithium-ion	Lithium-ion
Impact strength	IK07	IK07
Protection class	III	III
Degree of protection (IP)	IP44	IP44
Colour	black	black





Rechargeable Solar LED Outdoor Light GL 400 AS

The LED camping lamp is a versatile companion for activities in the home, garden, camping and outdoor activities.

- LED lamp outdoor with UV-resistant materials, anti-slip rubber coating and fold-out bracket.
- With replaceable standard Li-Ion 18650 battery, conveniently rechargeable via the USB C cable.
- Convenient charging option via the solar panel.
- With 3 switching levels 100%-50%-10% and powerbank function.
- Lights up during charging.



TECHNICAL DATA

Product number	1173740005	Light duration max.	45 h
EAN	4007123691838	Battery type	18650
UP	1	Battery technology	Lithium-ion
Colour temperature	5000 K	Impact strength	IK05
Battery capacity	3 Ah	Protection class	III
Battery voltage	3.6 V	Colour	black



Rechargeable Solar LED Outdoor Light OLI 400 AS

Versatile companion for activities in the home, garden, camping and outdoor activities.

- The camping lamp can be conveniently charged via the USB C cable or alternatively via the solar panel.
- With two exchangeable standard Li-Ion batteries 18500 3.7V/3Ah.
- With UV-resistant materials.
- Fold-out bracket with snap hook.
- Lights up during charging.
- Additional SOS and flashing function.
- With switching functions: Charge level indicator, spot light, combined light and continuously dimmable area light (100% - 5%).
- With power bank function.
- Includes USB C charging cable and USB C to USB A adapter.



TECHNICAL DATA

Product number	1173740004	Battery charging time approx.	3 h
EAN	4007123691739	Number of batteries	2
UP	1	Battery type	18500
Luminous flux	450 lm	Battery technology	Lithium-ion
Battery capacity	3 Ah	Protection class	III
Battery voltage	3.7 V	Degree of protection (IP)	IP54
Light duration max.	70 h	Colour	black



LED Rechargeable Outdoor Light OLI 310 AB with Bluetooth® speaker

- Highly versatile for use in the house, in the garden, when camping and for outdoor activities.
- Integrated Bluetooth® speaker with exceptional sound quality.
- Powerbank function: USB charging port 1 A for devices with USB charging cable such as smartphones, tablets, etc.
- Switch with functions: 100 % - 40 % - 10% - red - red flashing.
- Integrated Li-Ion battery 3.7 V/4 Ah with charging indicator.
- Fixing possibilities by magnet and hook.



TECHNICAL DATA

Product number	1171640	Battery charging time approx.	6 h
EAN	4007123667871	Number of batteries	1
UP	1	Battery type	Built-in battery pack
Luminous flux	350 lm	Battery technology	Lithium-ion
Colour temperature	4000 K	Impact strength	none
Battery capacity	4 Ah	Protection class	III
Battery voltage	3.7 V	Degree of protection (IP)	IP44
Light duration max.	54 h	Colour	anthracite/black



LED Outdoor Light OLI 0200

- Highly versatile for use in the house, in the garden, when camping and for outdoor activities.
- Non-blinding flood light.
- Switch with 3 different settings (100 - 50 %, 10 %, SOS).
- Mounting options provided by 2 magnets and 2 hooks.
- 9 pcs. delivered in an attractive sales box.



TECHNICAL DATA

Product number	1171550	Number of batteries	3
EAN	4007123653980	Battery type	Micro AAA LR03
UP	9	Battery technology	Alkaline
Luminous flux	180 lm	Degree of protection (IP)	IP44
Colour temperature	4000 K	Colour	anthracite
Light duration max.	45 h		



Flashlights



LuxPremium Rechargeable-Focus-LED-Flashlight TL AF

Extremely bright LED torch with high-quality focus function.

- With extra bright CREE-LED for powerful light.
- Infinitely focus from laminary light nearby to high beam focused light.
- Switch with soft-touch function for 100 % - 40 % - 10 % - SOS.
- Integrated Li-Ion rechargeable battery with charging indicator.
- Durable aluminum housing with wrist strap.
- USB C charging cable included.



TECHNICAL DATA

Product number	1178600402	1178600801
EAN	4007123691210	4007123691227
UP	1	1
Luminous flux	600 lm	1200 lm
Colour temperature	6500 K	6500 K
Colour rendering index	60-69 (class 2B)	70-79 (class 2A)
Battery capacity	2.6 Ah	4 Ah
Battery voltage	3.7 V	3.7 V
Light duration max.	26 h	31 h
Battery charging time approx.	3 h	4.5 h
Number of batteries	1	1
Battery type	18650	26650
Battery technology	Lithium-ion	Lithium-ion
Impact strength	IK07	IK07
Protection class	III	III
Degree of protection (IP)	IP67	IP67
Colour	black	black





LuxPremium Rechargeable-Focus-Selector-LED-Flashlight TL 400 AFS

Combines high brightness and fast function selection.

- With extra bright CREE-LED for powerful light.
- Mode selector for fast selection of the desired function.
- Several features: 100 % - 70 % - 40 % - 10 % - strobe - SOS.
- Infinitely focus from laminary light nearby to high beam focused light.
- Integrated Li-Ion battery 3.7 V/2.0 Ah with charging indicator.
- Durable aluminum housing with wrist strap.
- USB charging cable included.



TECHNICAL DATA

Product number	1178600201	Light duration max.	13 h
EAN	4007123663170	Battery charging time approx.	3 h
UP	1	Number of batteries	1
Luminous flux	430 lm	Battery type	18650
Colour temperature	7000 K	Battery technology	Lithium-ion
Colour rendering index	70-79 (class 2A)	Protection class	III
Battery capacity	2 Ah	Degree of protection (IP)	IP44
Battery voltage	3.7 V	Colour	black



Rechargeable Torch LED LuxPremium TL 410 A

Compact torch with high luminosity.

- Osram LED up to 50.000h lifetime and up to 131m luminous range.
- Switch with soft touch function for 100% - 40% - 10% - SOS.
- Durable aluminium housing with carrying strap.
- Rechargeable battery (3.7V / 2000mAh).
- With USB C charging interface, USB charging cable included.



TECHNICAL DATA

Product number	1173750005	Light duration max.	29 h
EAN	4007123684670	Battery charging time approx.	3.5 h
UP	1	Number of batteries	1
Luminous flux	400 lm	Battery type	18650
Power consumption	5 W	Battery technology	Lithium-ion
Colour temperature	6000 K	Protection class	III
Colour rendering index	70-79 (class 2A)	Degree of protection (IP)	IP44
Lifetime	50000 h	Colour	black
Battery capacity	2 Ah		



LuxPremium LED-Flashlight THL 300

Multifunctional torch with warning light.

- With extremely bright CREE and COB LEDs with up to 30 h lighting duration.
- Multifunctional switch with 8 operating modes:
 - Sequences: Spot at front 100 % - 20 % - Floodlight 100 % - 40 % - red - red flashing - off
 - Direct control: Spot at front 100 % - floodlight - red flashing.
- 180° foldable hook and magnet.
- Impact-resistant plastic housing and metal head.
- With wrist strap.



TECHNICAL DATA

Product number	1178690	Number of batteries	3
EAN	4007123663262	Battery type	Mignon AA LR6
UP	1	Battery technology	Alkaline
Luminous flux	360 lm	Impact strength	IK07
Total luminous flux secondary source	240 lm	Protection class	III
Colour temperature	7500 K	Degree of protection (IP)	IP54
Light duration max.	30 h	Colour	black



Rechargeable Torch LED LuxPremium TL 210 AF

Slim and lightweight pen torch with clip.

- Versatile use in a small and compact format.
- Osram LED up to 50,000h lifetime and up to 50m luminous range.
- Lightweight and robust aluminium housing.
- Switching levels 100%, 40%, 10%, SOS.
- Soft touch function for quick switching of the switching levels.
- With replaceable battery (3.7V/600mAh).
- Now with USB C charging interface, including USB charging cable.



TECHNICAL DATA

Product number	1173750003	Battery voltage	3.7 V
EAN	4007123684656	Light duration max.	13 h
UP	1	Battery charging time approx.	1.5 h
Luminous flux	200 lm	Battery type	Special battery
Power consumption	5 W	Battery technology	Lithium-ion
Colour temperature	6800 K	Protection class	III
Colour rendering index	70-79 (class 2A)	Degree of protection (IP)	IP44
Lifetime	50000 h	Colour	black
Battery capacity	0.6 Ah		



Torch LED LuxPremium TL 210 F

Slim and lightweight pen torch with clip.

- Versatile use in shirt pocket format.
- Osram LED up to 50,000h lifetime and up to 50m luminous range.
- Lightweight and robust aluminium housing.
- Switching levels 100%, 40%, 10%, SOS.
- Soft touch function for quick switching of the switching levels.
- Includes 2x AAA batteries.



TECHNICAL DATA

Product number	1173750002	Light duration max.	7 h
EAN	4007123684649	Number of batteries	2
UP	1	Battery type	Micro AAA LR03
Luminous flux	180 lm	Battery technology	Alkaline
Power consumption	5 W	Protection class	III
Colour temperature	6500 K	Degree of protection (IP)	IP44
Colour rendering index	60-69 (class 2B)	Colour	black
Lifetime	50000 h		



Eco-LED Laser Light

Laser pointer with LED flashlight.

- 8 powerful LEDs.
- Handy metal housing.
- With integrated, powerful laser pointer class 2: $P < 1 \text{ mW}$, $\lambda = 650 \text{ nm}$ (DIN 60825-1:2008-05).
- Soft-touch switch with 2 functions:
 - LEDs on
 - Laser pointer on.



TECHNICAL DATA

Product number	1179890100	Number of batteries	3
EAN	4007123633807	Battery type	Micro AAA LR03
UP	1	Battery technology	Alkaline
Luminous flux	45 lm	Protection class	III
Colour temperature	8500 K	Degree of protection (IP)	IP20
Battery voltage	1.5 V	Colour	black
Light duration max.	12 h		



Headlamps



LuxPremium LED rechargeable sensor head torch SL 401 AF

The headlamp with adjustable tilt angle and lightweight plastic housing is ideal for outdoor use, e.g. for jogging, hiking or assembly work.

- With extremely bright OSRAM LED and up to 50h light duration.
- Two operating modes: manual and infrared sensor.
- Infrared sensor for contactless switching on.
- Headlight 100% - 40% - 10% - SOS - Red.
- Rear light red, flashing red.
- Stepless focus from flat close-up light to focussed high beam.
- Battery pack at the back of the head for good balance.
- Replaceable Li-Ion battery 3.7 V/2.6 Ah with charge indicator.
- Adjustable tilt angle, lightweight and robust plastic housing.
- Includes USB C to C cable.



TECHNICAL DATA

Product number	1177310010	Light duration max.	50 h
EAN	4007123691272	Battery charging time approx.	4 h
UP	1	Number of batteries	1
Luminous flux	400 lm	Battery type	18650
Colour temperature	6500 K	Battery technology	Lithium-ion
Colour rendering index	70-79 (class 2A)	Protection class	III
Battery capacity	2.6 Ah	Degree of protection (IP)	IP44
Battery voltage	3.7 V	Colour	black



LuxPremium rechargeable LED head torch KL 251 AF

The headlamp is ideal for outdoor use, e.g. for jogging, hiking or assembly work.

- With extremely bright CREE LED at the front with up to 40 hours light duration.
- Switch with functions 100 % - 50 % - 10 % - SOS, rear light flashes red/red.
- Stepless focus from flat close-up light to focussed high beam.
- Battery pack at the back of the head for good balance.
- Replaceable Li-Ion battery 3.7 V/2.6 Ah with charge indicator.
- Adjustable tilt angle, lightweight and robust plastic housing.
- Includes USB C to C cable.



TECHNICAL DATA

Product number	1177300010	Light duration max.	40 h
EAN	4007123691265	Battery charging time approx.	4 h
UP	1	Number of batteries	1
Luminous flux	250 lm	Battery type	18650
Colour temperature	6500 K	Battery technology	Lithium-ion
Colour rendering index	60-69 (class 2B)	Protection class	III
Battery capacity	2.6 Ah	Degree of protection (IP)	IP44
Battery voltage	3.7 V	Colour	black



LuxPremium LED-Headlight KL 200 F

Ultra lightweight for more comfort.

- With extra bright CREE-LED for powerful light.
- Infinitely focus from laminary light nearby to high beam focused light.
- Front and rear lights.
- Back of head battery pack for balanced and comfortable wearing.
- Switch with 4 different settings (40 %, 100 %, 100 % and red-blinking light at back, SOS).
- Focus angle can be adjusted.



TECHNICAL DATA

Product number	1178780	Number of batteries	3
EAN	4007123636761	Battery type	Mignon AA LR6
UP	1	Battery technology	Alkaline
Luminous flux	200 lm	Protection class	III
Colour temperature	6500 K	Degree of protection (IP)	IP44
Light duration max.	16 h	Colour	black



LuxPremium LED-Headlight KL 100

Ultra lightweight for more comfort.

- With extra bright CREE-LED for powerful light.
- Ideal for any application (work, sports, leisure) leaving both hands free.
- Switch with 3 different settings (100 %, 20 %, SOS).
- Focus angle can be adjusted.
- Back of head battery pack for balanced and comfortable wearing.



TECHNICAL DATA

Product number	1178760	Number of batteries	2
EAN	4007123636723	Battery type	Mignon AA LR6
UP	1	Battery technology	Alkaline
Luminous flux	100 lm	Protection class	III
Colour temperature	6500 K	Degree of protection (IP)	IP44
Light duration max.	35 h	Colour	black



Night-Lights



LED Sensor-Switched Security Light SSL 40 A

with infrared motion detector

- Automatically switches on in the event of a power failure, removal from the charging station or movement in the dark.
- Super-bright SMD LEDs with up to 3 hours of light duration with fully charged battery.
- Infrared motion detector with 90° horizontal detection angle and max. 3m range.
- Can be used outside the charging cradle as a torch with 1 SMD LED or as an area light with 9 SMD LEDs.
- Built-in Li-Ion battery is charged inductively.
- Charging cradle 230 V, 50 Hz.



TECHNICAL DATA

Product number	1173240020
EAN	4007123674381
UP	1
Luminous flux	50 lm
Total luminous flux secondary source	40 lm
Power consumption	1.2 W
Colour temperature	3000 K
Colour rendering index	80-89 (class 1B)
Nominal input voltage	230 V
Lifetime	35000 h
Battery capacity	0.5 Ah
Battery voltage	3.7 V
Light duration max.	3.5 h
Battery charging time approx.	15 h
Number of batteries	1
Battery type	Built-in battery pack
Battery technology	Lithium-ion
Protection class	II
Degree of protection (IP)	IP20
Colour	white

**Battery LED Nightlight NLB 02 BS****with infrared motion detector and push switch**

- Battery LED nightlight with 2 LEDs.
- PIR sensor with 100° horizontal detection angle and max. 3 m range.
- Soft lighting.
- Push switch On/Off.
- Independent from the socket.
- 2 magnets and hooks.

**TECHNICAL DATA**

Product number	1173290	Battery type	Mignon AA LR6
EAN	4007123637683	Battery technology	Alkaline
UP	1	Protection class	III
Luminous flux	60 lm	Degree of protection (IP)	IP20
Light duration max.	20 h	Colour	white
Number of batteries	3		

**LED Nightlight OL 02R****with twilight sensor**

- Nightlight with twilight sensor and 2 LEDs for years of continuous operation.
- Exceptionally low electricity consumption, appr. 0.85 W.
- Switches on automatically at dusk.
- Provides safety in dark rooms.
- Soft lighting.

**ENGINEERED IN
GERMANY****TECHNICAL DATA**

Product number	1173210	Nominal input voltage	230 V
EAN	4007123610440	Min.-Max. Nominal input voltage	220 V - 240 V
UP	1	Protection class	II
Luminous flux	0.5 lm	Degree of protection (IP)	IP20
Power consumption	0.85 W	Colour	white



LED Nightlight OL 02

with twilight sensor

- Nightlight with twilight sensor and 2 LEDs for years of continuous operation.
- Provides safety in dark rooms.
- Soft lighting.
- Switches on automatically at dusk.
- Exceptionally low electricity consumption.



TECHNICAL DATA

Product number	1507220	Min.-Max. Nominal input voltage	220 V - 240 V
EAN	4007123148394	Protection class	II
UP	1	Degree of protection (IP)	IP20
Power consumption	0.85 W	Colour	white
Nominal input voltage	230 V		



LED Nightlight OL 02E

with twilight sensor

- Nightlight with twilight sensor and 2 LEDs for years of continuous operation.
- Exceptionally low electricity consumption, appr. 0.85 W.
- Switches on automatically at dusk.
- Provides safety in dark rooms.
- Soft lighting.




**ENGINEERED IN
GERMANY**



TECHNICAL DATA

Product number	1173220	Nominal input voltage	230 V
EAN	4007123610457	Min.-Max. Nominal input voltage	220 V - 240 V
UP	1	Protection class	II
Luminous flux	1 lm	Degree of protection (IP)	IP20
Power consumption	0.85 W	Colour	white



Accessories



Adapter for Multi Battery LED Work Light

- Use the 18V battery system of your choice in any brennenstuhl® Multi Battery LED construction spotlight thanks to the interface adapter.
- The adapter can be inserted into the work spotlight at the brennenstuhl® interface in one easy step.
- The handy adapter can be locked in place without screws - maximum flexibility with the Brennenstuhl Multi Battery 18V System.

brennenstuhl®
MULTI BATTERY
18V-SYSTEM

TECHNICAL DATA

Product number	1172640063	1172640066	1172640064	1172640065
EAN	4007123677948	4007123676071	4007123677979	4007123677986
UP	1	1	1	1
Colour	black	black	black	black



Professional Wireless Charging Pad WCP

The wireless charging pad enables convenient wireless charging of wireless charging-capable devices.

- Charging station with integrated holder for secure placement of mobile devices during the charging process.
- Compatible with USB C charging power supply 20W Power Delivery (article number 1172640083), enables charging power of up to 10W (power supply not included).
- Wireless charging pad with suspension device for easy mounting.
- Equipped with two magnets on the back for secure attachment and stable hold.
- Wireless charger with LED indicator for status display during charging.
- Incl. 1m USB C cable.

PROFESSIONAL



TECHNICAL DATA

Product number	1173780001
EAN	4007123691920
UP	1
Colour	black/grey



Site Bulb Fitting E27

- Ready wired with a 2-pin luster terminal.
- With a fastening plate with 3 holes.
- Connecting cable 15 cm.
- For bulbs with E27 fitting.

TECHNICAL DATA

Product number	1179900
EAN	4007123188963
UP	10



Universal magnetic holder MH 1

- The magnetic holder allows flexible attachment.
- Easy attachment of spotlights to metallic surfaces.
- Load capacity up to approx. 3 kg.
- With M6 thread, 1x star screw 12mm winde, star screw with 30mm thread.

TECHNICAL DATA

Product number	1172640082
EAN	4007123685639
UP	1
Colour	black



Magnetic holder for Rechargeable LED Spot

- Suitable for: 1173100100, 1173110100

TECHNICAL DATA

Product number	1172640002
EAN	4007123653201
UP	1
Colour	black



www.brennenstuhl.com

Hugo Brennenstuhl GmbH & Co. KG · Seestraße 1 - 3 · 72074 Tübingen · Germany

All products in this catalogue are subject to technical changes · 4624